

DEWALT®



THE
**POWER OF
FREEDOM**

2022



COMPLETE SOLUTIONS

DEWALT® is a market-leading manufacturer of premium power tools, accessories and anchors and fixings that provides a fully integrated system solution for various applications.

DEWALT® tools offer unparalleled performance, with durable construction for a professional finish. Rely on DEWALT® to get the job done, with a 2 year guarantee on most tools.



XR FLEXVOLT

Taking cordless drilling to the next level, the newest DEWALT® 54V XR FLEXVOLT® range provides true corded performance without the restrictions of the cord. With Brushless motors and Perform & Protect™ low vibration levels, these tools set the new standard on the jobsite.

With over 50 tools in the range the 18V XR® Lithium-Ion battery platform is the biggest and fastest growing in our range. All 18V XR® products are compatible with XR FLEXVOLT® batteries, giving you longer runtime and even greater flexibility meaning the CORDLESS JOBSITE has arrived.



WHY CHOOSE DEWALT®?

END USER TESTING

Every one of our products are tested at length by genuine construction professionals, ensuring they never let a user down. Under the most demanding jobsite conditions, DEWALT® tools earn the right to be labelled GUARANTEED TOUGH® – in the hands of real users.

INNOVATIVE PRODUCTS

To support our users and drive our industry forward, DEWALT® consistently develop truly innovative products, across multiple categories.

This technical strength is regularly recognised by international design awards.

USER LOYALTY

DEWALT® guarantees to deliver and service high performance solution that enable the end-user to achieve productive and professional results. The cast-iron DEWALT® guarantee and premium service network ensure that our users have faith in the quality of our products. First-time buyers will become loyal DEWALT® users.

DEWALT®

CONTENTS

CORDLESS POWER TOOLS

P.8



BATTERIES & CHARGERS

P.28



CORDED POWER TOOLS

P.32



Based on roughly 100 years of history, DeWalt has built up its reputation for industrial power tools in the fields of design, engineering, and construction.

Over the past several decades, the outstanding quality and durability of DeWalt products have made them the most trusted by professional engineers, industrial and commercial operators, and manufacturing and maintenance workers around the world.

LASER INSTRUMENTS

P.63



STORAGE

P.70



ACCESSORIES & PARTS

P.78



* Product images may differ from actual products.





Cordless Screwdriver	08
Cordless Drill Drivers	09
Cordless Hammer Drill Drivers	11
Cordless Impact Drivers	14
Cordless Impact Wrenches	15
Cordless SDS Plus Hammers	17
Cordless Grinders	18
Other Cordless Tools	19
FLEXVOLT Tools	22

7.2V LITHIUM ION COMPACT SCREWDRIVER

DCF008

Voltage	7.2 V
Battery Chemistry	Lithium Ion
Battery Capacity	1.5 Ah
Revolutions per minutes	180/600/min
Max torque (low speed)	10 Nm
Max torque (high speed)	8 Nm
Weight	0.65 kg
Length x Height	340X60/280X170 mm



10.8V LITHIUM ION COMPACT SCREWDRIVER

DCF610D2

Voltage	10.8 V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Tool Holder	6.35 mm
Max. Torque	8 Nm
No Load Speed	0-1050 rpm
Weight	0.76 kg
Length x Height	158 x 190 mm



12V MAX LITHIUM ION BRUSHLESS COMPACT SCREWDRIVER

DCF601D2

Voltage	12V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
No load speed	1-1100 rpm
Tool holder	6.35mm
Max Drill ø	10mm
Weight (without battery pack)	0.68kg



10.8V 1.3AH 10MM COMPACT DRILL

DCD700C2

Voltage	10.8V
Battery Chemistry	Lithium Ion
Battery Capacity	1.3 Ah
Max. Torque (Soft / Hard)	15 / 24 Nm
No Load Speed	0-400/1500 rpm
Chuck Capacity	1-10 mm
Max. Drilling Capacity [Wood / Metal]	20 / 10 mm
Weight	1.1 kg
Length x Height	185 x 195 mm



10.8V XR

ALSO AVAILABLE AS:

DCD700C2A (WITH 109 PCS ACCESSORY SET)



10.8V 2.0AH 10MM COMPACT DRILL

DCD710D2

Voltage	10.8V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Max. Torque (Soft / Hard)	15 / 24 Nm
No Load Speed	0-400/1500 rpm
Chuck Capacity	1-10 mm
Max. Drilling Capacity [Wood / Metal]	20 / 10 mm
Weight	1.1 kg
Length x Height	185 x 195 mm



10.8V XR



18V 1.5AH 13MM BRUSHLESS DRILL

DCD777S2T

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	1.5 Ah
Max. Torque (Hard/Soft)	65/26 Nm
No Load Speed	0-500/17500 rpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood / Metal]	30/13 mm
Weight	1.5 kg
Length x Height	192 x 198 mm



BRUSHLESS
18V XR



18V 13MM LITHIUM ION BRUSHLESS DRILL

DCD7771D2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Max Torque (Hard)	65 Nm
Max Torque (Soft)	26 Nm
No Load Speed	0-500/1750 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal]	38/13 mm
Weight (Tool Only)	1.15 kg
Length x Height	192 x 198 mm



NEW



BRUSHLESS

18V XR

18V 1.5AH 13MM BRUSHLESS COMPACT DRILL

DCD708S2T

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	1.5Ah
Max. Torque (Hard/Soft)	65/26Nm
No Load Speed	0-450/1650 rpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal]	35/13 mm
Weight	1.45 kg
Length x Height	160 x 198 mm



BRUSHLESS

18V XR

18V 1.5AH 13MM COMPACT DRILL

DCD771S2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	1.5 Ah
Max. Torque (Hard)	42 Nm
Max. Torque (Soft)	24 Nm
No Load Speed	0-450/1500 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal]	25/13 mm
Weight	1.65 kg
Length x Height	219 x 191 mm



18V XR

18V BRUSHLESS 3-SPEED DRILL

DCD991NT

Voltage	18V
Max. Torque (Hard)	95 Nm
Max. Torque (Soft)	66 Nm
No Load Speed	0-450/1300/2000 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal]	55/15 mm
Weight	2.1 kg
Length x Height	200 X 208 mm



BRUSHLESS
18V XR



12V MAX 2.0AH BRUSHLESS MULTI-HEAD DRILL

DCD703D2

Voltage	12V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
No-load Speed [1st gear/ 2nd gear]	0-425/ 0-1500 min ⁻¹
Max Torque	57.5 Nm
Chuck Capacity	10 mm
Maximum Drilling Capacity [Wood/Metal]	20/10 mm
Weight [without battery pack or heads]	0.73 kg

COMING SOON



BRUSHLESS
12V XR



10.8V 2.0AH HAMMER DRILL DRIVER

DCD716D2

Voltage	10.8V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Max. Torque (Soft / Hard)	16 / 30 Nm
No Load Speed	0-1050 min ⁻¹
Beats per Minute	0-6000/22500 bpm
Chuck Capacity	1-10 mm
Max. Drilling Capacity [Wood / Metal / Masonry]	20 / 10 / 8 mm
Weight	1.18 kg
Length x Height	200 x 210 mm



10.8V XR



18V 1.5AH 13MM HAMMER DRILL DRIVER

DCD776S2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	1.5 Ah
Max. Torque (Hard)	42 Nm
Max. Torque (Soft)	24 Nm
No Load Speed	0-400/1500 rpm
Beats Per Minute	0-7650/25500 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal/Masonry]	30/13/13 mm
Weight	1.7 kg
Length x Height	228 x 191 mm



ALSO AVAILABLE AS:
DCD776S2A (WITH 100 PCS ACCESSORY KIT)



18V 1.5AH 13MM BRUSHLESS COMPACT HAMMER DRILL DRIVER

DCD709S2T

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	1.5 Ah
Max. Torque (Hard/Soft)	65/26 Nm
No Load Speed	0-450/1650 rpm
Beats Per Minute	0-28050 bpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal/Masonry]	30/13/13 mm
Weight	1.5 kg
Length x Height	175 x 198 mm



18V 13MM LITHIUM ION BRUSHLESS HAMMER DRILL DRIVER

DCD7781D2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Max Torque (Hard)	65 Nm
Max Torque (Soft)	26 Nm
No Load Speed	0-500/1750 rpm
Beats per Minute	0-8500/29750 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal/Masonry]	38/13/13 mm
Weight (Tool Only)	1.18 kg
Length x Height	204 x 198 mm



NEW

BRUSHLESS
18V XR



18V 13MM HAMMER DRILL DRIVER

DCD785M2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	4.0 Ah
Max. Torque	60 Nm
No Load Speed	0-600/2000 rpm
BeaVMin.	0-10200/34000 bpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal/Masonry]	38 /13/13 mm
Weight	1.88 kg
Length x Height	192 x 198mm



18V XR



18V BRUSHLESS 3-SPEED HAMMER DRILL DRIVER

DCD996P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
Max. Torque (Hard)	95 Nm
Max. Torque (Soft)	66 Nm
No Load Speed	0-450/1300/2000 rpm
Beats Per Minute	0-8600/25500/38250 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal/Masonry]	55/15/16 mm
Weight	2.2 kg
Length x Height	213 x 208 mm



BRUSHLESS
18V XR

ALSO AVAILABLE AS:

DCD996NT



12V BRUSHLESS COMPACT IMPACT DRIVER

DCF801D2

Voltage	12V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
No-load speed	0-2850rpm
Precision Mode	0-950 min-1
Lo Mode	0-1950 min-1
Hi Mode	0-2850 min-1
Impact rate	0-3600 min-1
Max. torque	163 Nm
Tool holder	6.35 mm
Weight	0.8 kg



18V 6.35MM 3 SPEED IMPACT DRIVER

DCF887D2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Max. Torque	205 Nm
No Load Speed	0-1000/2800/3250 rpm
Impacts Per Minute	0 - 3800 ipm
Max. Bolt Diameter	M14
Tool Holder	6.35 mm (1/4")
Weight	1.52 kg
Length x Height	134 x 245 mm



ALSO AVAILABLE AS:

DCF887NT




18V 2.0AH BRUSHLESS 3-SPEED IMPACT DRIVER

DCF850D2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Max. Torque	205 Nm
No Load Speed	3250 rpm
Impact Rate	3800 ipm
Mode Select	3 Speed
Length	100 mm
Weight	0.9 kg

NEW



18V BRUSHLESS ULTRA-COMPACT IMPACT DRIVER

DCF809L2T

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	3.0Ah
Max. Torque	190 Nm
No Load Speed	0-2800 rpm
Impacts Per Minute	0 - 3200 ipm
Max. Bolt Dia.	M12
Tool Holder	6.35 mm (1/4")
Weight	1.25 kg
Length x Height	130 x 236 mm



12V BRUSHLESS COMPACT IMPACT WRENCH

DCF902D2

Voltage	12V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Tool Holder	3/8"/9.5 mm
Max. Torque	168 Nm
No Load Speed	
Precision Mode	0-2850 min-1
Lo Mode	0-1000 min-1
Hi Mode	0-2850 min-1
Weight	0.8 kg
Length x Height	125 x 188 mm



18V 1/2" COMPACT IMPACT WRENCH

DCF880M2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	4.0 Ah
Max. Torque	203 Nm
No Load Speed	0 - 2300 rpm
Impacts Per Minute	0 - 2700 ipm
Max. Bolt Diameter	M16
Tool Holder	1/2" (13 mm)
Weight	1.62 kg
Length x Height	147 x 240 mm



ALSO AVAILABLE AS:

DCF880NT



18V 1/2" BRUSHLESS IMPACT WRENCH (MID TORQUE)

DCF894P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
Max. Torque	447 Nm
Breakaway Torque	813Nm
No Load Speed	0-900/2000 rpm
Impacts Per Minute	0 - 3100 ipm
Max. Bolt Diameter	M18
Tool Holder	1/2" (13 mm)
Weight	2.12 kg
Length x Height	175 x 210 mm



18V 1/2" BRUSHLESS IMPACT WRENCH (MID TORQUE)

DCF899P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
Max. Torque	950 Nm
Breakaway Torque	1625 Nm
No Load Speed	0-400/1200/1900 rpm
Impacts Per Minute	0 - 2300 ipm
Max. Bolt Diameter	M22
Tool Holder	1/2" (13 mm)
Weight	3.22 kg
Length x Height	224 x 278 mm



ALSO AVAILABLE AS:

DCF899NT



18V 3/4" BRUSHLESS IMPACT DRIVER (HIGH TORQUE) - BARE

DCF897N

Voltage	18V
3 Torque Settings	136/407/950 Nm
Breakaway Torque	1627 Nm
No Load Speed	0-400/1200/1900 rpm
Impacts Per Minute	0 - 2400 ipm
Max. Bolt Diameter	M24
Tool Holder	3/4" (19 mm)
Weight	3.26 kg
Length x Height	224 x 278 mm



18V ULTRA-COMPACT BRUSHLESS SDS PLUS ROTARY HAMMER

DCH172M2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	4.0 Ah
Tool Holder	SDS-Plus
Impact Energy (EPTA 05/2009)	1.4 J
No Load Speed	0-1060 rpm
Blows per Minute	0-4980 bpm
Optimum Drilling Capacity	4-10 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	16/16/10 mm
Weight	1.78 kg
Length x Height	265 x 73 mm
Vibration Control	8.8 m/s ²



NEW

BRUSHLESS

18V XR

18V 26MM BRUSHLESS SDS-PLUS HAMMER

DCH133M1

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	4.0 Ah
Tool Holder	SDS-Plus
Max. Impact Energy	2.8 J
Impact Energy (EPTA 05/2009)	2.6 J
No Load Speed	0-1500 rpm
Blows Per Minute	0-5500 bpm
Optimum Drilling Capacity [Concrete]	4-14 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	26/30/13 mm
Chipping Mode	Yes
Weight	2.9 kg
Length x Height	383 x 161 mm
Vibration Level	14.5 m/s ²



BRUSHLESS

18V XR

ALSO AVAILABLE AS:

DCH133NT



18V 28MM BRUSHLESS SDS PLUS HAMMER

DCH263P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
Single impact energy	3.0 J
No Load Speed	0-1165 min ⁻¹
No-Load Impact Rate	0-4300 bpm
Maximum Core Drilling Capacity in Soft Brick	65 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	28/30/13 mm
Collar Diameter	54 mm
Weight	2.7kg
Length x Height	125 x 188 mm
Vibration Level	9.1 m/s ²



PERFORM PROTECT

BRUSHLESS

18V XR

18V 24MM 3 MODE SDS-PLUS HAMMER

DCH253M2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	4.0 Ah
Tool Holder	SDS-Plus
Max. Impact Energy	2.4 J
Impact Energy (EPTA 05/2009)	2.1 J
No Load Speed	0-1200 rpm
Blows Per Minute	0-4500 bpm
Optimum Drilling Capacity [Concrete]	4-12 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	24/26/13 mm
Chipping Mode	Yes
Weight	3.1 kg
Length x Height	301 x 202 mm
Vibration Level	6.6 m/s ²



18V 125MM BRUSHLESS ANGLE GRINDER

DCG412M2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	4.0 Ah
Disc Diameter	125 mm
Spindle Thread	M14
Switch Type	Trigger
No Load Speed	8000 rpm
Weight	2.5 kg
Length x Height	400 x 125 mm



18V 125MM BRUSHLESS ANGLE GRINDER

DCG405P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
Disc Diameter DCG405P2 (QW)	125 mm
Disc Diameter DCG405P2 (IN)	4" (100 mm)
No Load Speed	9000 rpm
Spindle Thread	M14/M10
Switch Type	Slider
Weight	2.37 kg
Length x Height	310 x 125 mm



ALSO AVAILABLE AS IN VERSION:

DCG405P2-IN (DISC DIAMETER: 100 MM)



18V BRUSHLESS DIE GRINDER

DCG426P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
Collet Size	1/4 in.
No Load Speed	0-10000/17,500/25,000 rpm
Speed Settings	3
Max. Wheel Diameter	38 mm
Weight	1.82 kg
Length x Height	380 x 85 mm



BRUSHLESS

18V XR



18V LITHIUM ION HEAT GUN - BARE

DCE530N

Voltage	18V
Temperature Settings	2
Operating Temperature	290/530 Cel
Airflow	109/190 L/Min
Weight	0.5 kg
Length	161 mm
Height	194.8 mm



18V XR



18V BRUSHLESS POLISHER

DCM848P2

Voltage	18V
Battery Capacity	5.0 Ah
Battery Chemistry	Lithium Ion
No Load Speed	2000–5500 OPM
Recommended backing pad diameter	125 mm
Max. backing pad diameter	125 mm
Weight	2.9 kg



18V BRUSHLESS COMPACT RECIPROCATING SAW

DCS367P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
No Load Stroke Rate	0-2900 spm
Stroke Length	28.6 mm
Max. Depth of Cut [Wood/Pipe/PVC]	300/100/160 mm
Weight	2.9 kg
Length x Height	363 x 203 mm



18V 184MM LITHIUM ION BRUSHLESS CIRCULAR SAW

DCS570P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
No Load Speed	5500 rpm
Blade Diameter	184 mm
Blade Bore Diameter	16 mm
Bevel Capacity	57°
Max. Depth of Cut at 45°/90°	46/64 mm
Weight	4.2 kg
Length x Height	355 x 245 mm



18V LITHIUM ION BRUSHLESS CONCRETE NAILER

DCN890P2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0 Ah
Nail Diameter	2.6 - 3.7 mm
Nail Length	13 - 57 mm
Nail Width	5.6 - 6.4 mm
Magazine Angle	15°
Magazine Capacity	Up to 30 Nails
Magazine Loading	Underneath
Operating Mode	Sequential and Rapid Cycle
Nose Included	Non magnetic / Drywall nose
Weight	4.8 kg
Length x Height	415 x 390 mm



BRUSHLESS

18V XR



18V LITHIUM ION BRUSHLESS 16GA. FINISH NAILER

DCN660D2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0Ah
Nail Diameter	1.6 mm
Nail Length	32 - 63 mm
Magazine Angle	20°
Magazine Capacity	110 Nails
Magazine Loading	Rear
Operating Mode	Bump and Sequential
Weight	2.8 kg
Length x Height	310 x 305 mm



BRUSHLESS

18V XR



18V LITHIUM ION BRUSHLESS OSCILLATING TOOL

DCS355D2

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0 Ah
Oscillations Per Minute	0-20,000 opm
Oscillation Angle	1.6°
Switch Type	Variable Dual Grip
Tool Free Accessory Fitment	Yes
Weight	1.68 kg
Length x Height	310 x 150 mm



BRUSHLESS

18V XR



18V LITHIUM ION BRUSHLESS COLLATED DRYWALL SCREWDRIVER - BARE

DCF620NT

Voltage	18V
Tool Holder	6.35 mm
Max. Torque	5 - 30 Nm
No Load Speed	0 - 4400 rpm
Max. Screw Diameter	55 mm
Weight	1.7 kg
Length x Height	380 x 233 mm



1.3MM 2450SPM METAL SHEAR - BARE

DCS491NT

Voltage	18V
No Load Stroke Rate	0-2450 spm
Cutting Capacity [Mild Steel]	1.3 mm
Cutting Capacity [Stainless Steel]	1.0 mm
Weight	1.8 kg
Length x Height	394 x 200 mm



54V LITHIUM ION BRUSHLESS 40CM CHAIN SAW

DCM575X1

Battery Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	9.0 Ah
Bar Length	40cm
Max. Cutting Capacity	40cm
Chain Speed	15m/s
Chain Brake	< 1sec
Variable Speed	Yes
Chain Tensioning	Tool Free
Oil Capacity	115ml
Weight	5.4 kg



54V BRUSHLESS COMPRESSOR - BARE

DCC1054N


Voltage	54 V
Tank Volume	10L
Air Delivery [at 7 BAR]	31 L/min
Max. Pressure	9.3 BAR
Regulated Pressure Rating	0 - 9.3 BAR
Quick Connect Type	Universal EU 1/4 •
Pump Type	Pump Type Oil-free
Weight	11 kg
Length x Height	360 x 420 mm



54V BRUSHLESS BLOWER - BARE

DCM572N

Battery Voltage	54V
Blow Speed	0-207km/h
Blow Area Volume	423 CFM
Variable Speed	Yes
Lock On Switch	Yes
Weight	3.33 kg

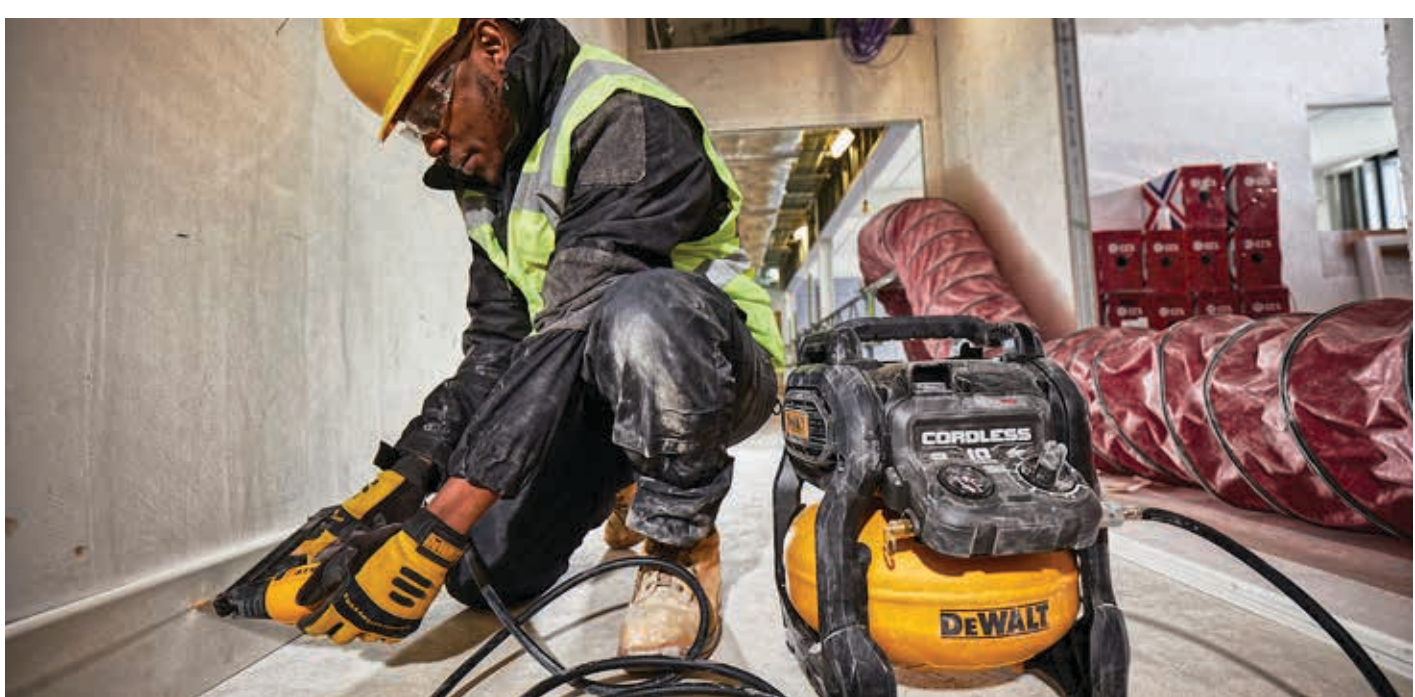

54V 30MM BRUSHLESS 3 MODE SDS-PLUS HAMMER

DCH333X2

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	9.0Ah
Max. Impact Energy	4.2 J
No Load Speed	0-1000 rpm
Blows Per Minute	0-4480 bpm
Opti Drilling Capacity [Concrete]	6-20 mm
Drilling Cap [Concrete/Wood/Metal]	30/30/13 mm
Weight	4.9 kg
Length x Height	400 x 250 mm
Vibration Level	7.5 m/s'



ALSO AVAILABLE AS:

DCH333NT

BARE



BRUSHLESS

54V XR FLEX VOLT



54V LITHIUM ION BRUSHLESS RECIPROCATING SAW


DCS388T2

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	6.0 Ah
No Load Stroke Rate	2400 spm
Stroke Length	40 mm
Max. Depth of Cut [Wood/Pipe/PVC]	300/130/160 mm
Weight	5.6 kg
Length x Height	918 x 219 mm



BRUSHLESS

54V XR FLEX VOLT

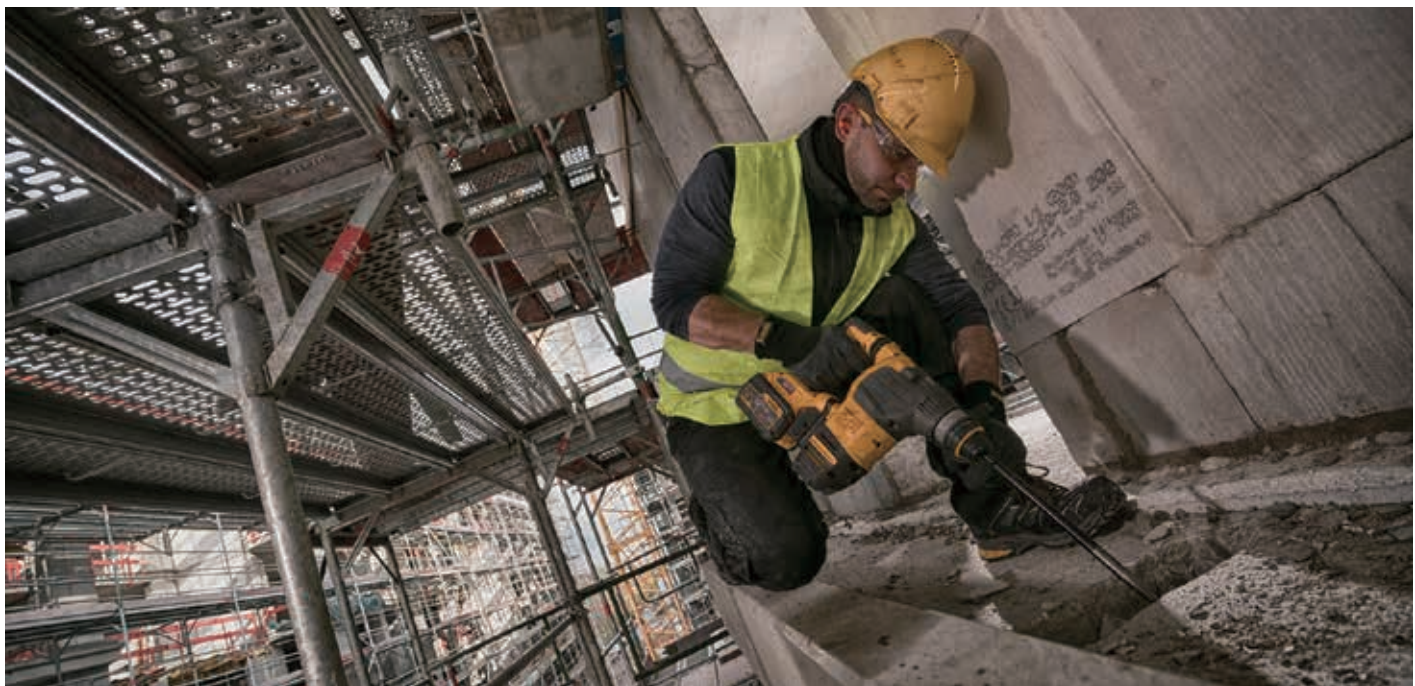

54V 67MM BRUSHLESS CIRCULAR SAW - BARE

DCS575NT

Voltage	54V
No load speed	5800 rpm
Blade Diameter	190 mm
Blade Bore Diameter	30 mm
Bevel Capacity	57°
Max. Depth of cut at 45°/90°	49/67 mm
Weight	4.65 kg
Length x Height	355 x 245 mm



54V LITHIUM ION BRUSHLESS DUAL HANDLE PADDLE MIXER

DCD240X2

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	9.0 Ah
Max. Paddle Size	160 mm
Spindle Thread	M14
Speed Settings	Yes
No Load Speed	0-225-350-475-600-725 rpm
Lock-Off Switch	Yes
Weight	6.15 kg
Length x Height	550 x 430 mm



54V 216MM BRUSHLESS TABLE SAW

DCS7485T2

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	6.0 Ah
No Load Speed	5800 rpm
Blade Diameter	216 mm
Blade Bore Diameter	25.4 mm
Bevel Capacity	-3 to 48°
Max. Ripping Capacity [Right/Left]	610 / 318 mm
Max. Depth of Cut at 45°/90°	45 / 65 mm
Table Size	485 x 485 mm
Weight 2	1.5 kg
Length x Height	605 x 330 mm



54V 40MM BRUSHLESS SDS-MAX® COMBINATION HAMMER

DCH481X2

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	9.0 Ah
Tool Holder	SDS-Max
Max. Impact Energy	7.3 J
Impact Energy (EPTA 05/2009)	6.1 J
No Load Speed	540 rpm
Blows Per Minute	3150 bpm
Optimum Drilling Capacity [Concrete]	16-30 mm
Max. Drilling Capacity [Concrete/Core bit]	40 / 100 mm
Chipping Mode	Yes
Weight	6.65 kg
Length x Height	502 x 263 mm
Vibration Level	9.4 m/s ²



54V 230MM BRUSHLESS CUT-OFF SAW - BARE

DCS690N

Voltage	54V
No Load Speed	6600 rpm
Blade Diameter	230 mm
Blade Bore Diameter	22.2 mm
Max. Depth of Cut	83 mm
Water Pipe Connection	Yes
Weight	6.25 kg
Length x Height	640 x 250 mm





BATTERIES & CHARGERS

BATTERIES	28
CHARGERS	29

10.8V 2.0AH LITHIUM ION BATTERY

DCB127



**2.0
AH**

10.8V > XR

Voltage	10.8V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0Ah
Tool Compatibility	All 10.8V* Li-Ion DEWALT tools (*12V max. equivalent)
Tool Connect	No
Weight	0.2 kg
Length x Height	85 x 35 mm

18V 1.5AH LITHIUM ION BATTERY

DCB181



**1.5
AH**

18V > XR

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	1.5Ah
Tool Compatibility	All 18V Li-Ion DEWALT tools
Tool Connect	No
Weight	0.35 kg
Length x Height	110 x 45 mm

18V 2.0AH LITHIUM ION BATTERY

DCB183



**2.0
AH**

18V > XR

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	2.0Ah
Tool Compatibility	All 18V Li-Ion DEWALT tools
Weight	0.40 / 0.45 kg
Length x Height	110 x 45 / 110 x 48 mm

18V 5.0AH LITHIUM ION BATTERY

DCB184



**5.0
AH**

18V > XR

Voltage	18V
Battery Chemistry	Lithium Ion
Battery Capacity	5.0Ah
Tool Compatibility	All 18V Li-Ion DEWALT tools
Weight	0.62 / 0.67 kg
Length x Height	110 x 65 / 110 x 69 mm

18V/54V 6.0AH FLEXVOLT BATTERY

DCB606

Voltage	18V / 54V
Battery Capacity	6.0Ah / 2.0Ah
Tool Compatibility	All 18V & 54V Li-Ion DEWALT Tools
Tool Connect	No
Weight	1.05 kg
Length x Height	125x90mm



**6.0
AH**

18V > XR

**54V > XR FLEX
VOLT**

18V/54V 12.0AH FLEXVOLT BATTERY

DCB612



12 AH



Voltage	18V / 54V
Battery Capacity	12.0Ah / 4.0Ah
Tool Compatibility	All 18V & 54V Li-Ion DEWALT Tools
Tool Connect	No
Weight	1.25 kg
Length x Height	135x95mm

10.8V-18V MULTI VOLTAGE LI-ION COMPACT CHARGER

DCB107



Battery Type	Li-Ion
Tool Compatibility	All 18V Li-Ion Tools
Tool Connect	No
Weight	1.25 kg
Volume	1130cm ³

18V/54V 9.0AH FLEXVOLT BATTERY

DCB609



9.0 AH



Voltage	18V / 54V
Battery Capacity	9.0Ah / 3.0Ah
Tool Compatibility	All 18V and 54V Li-Ion DEWALT Tools
Tool Connect	No
Weight	1.25 kg
Length x Height	135x95 mm

18V / 54V FAST CHARGER

DCB118



Voltage	18V (included Flexvolt)
Battery Chemistry	Lithium Ion
Charging Current	8A
Charging Time	60 mins (20V 6.0Ah)
Weight	0.65 kg
Length x Height	150 x 80 mm

DUAL PORT CHARGER

DCB132

Voltage	10.8V / 18V (Incl. Flexvolt)
Battery Capacity	Lithium Ion
Charging Current	2x 4A
Charging Time	90 mins (2x 18V 6.0Ah)
Weight	1.2 kg
Length x Height	320 x 80 mm



CORDED POWER TOOLS





SDS Plus Hammers	32	7" Angle Grinders	08
SDS Max Combi Hammers	34	9" Angle Grinders	48
Chipping Hammers	35	Die Grinders	49
Breakers	36	Chop Saws	50
Other Construction Tools	38	Other Metal Working Tools	51
Screwdrivers	39	Mitre Saws	52
Impact Wrenches	39	Jig Saws	53
Drill Drivers	40	Circular Saws	54
4" Angle Grinders	42	Sanders	54
5" Angle Grinders	43	Routers	55
		Other Wood Working Tools	56
		Speciality Tools	57
		Attachments	59

22MM 2 MODE SDS PLUS HAMMER

D25032B

Power Input	710W
Max. Impact Energy	2.1 J
Impact Energy (EPTA 05/2009)	2.0 J
No Load Speed	0-1550 rpm
Blows Per Minute	0-5680 bpm
Optimum Drilling Capacity [Concrete]	4-12 mm
Max. Drilling Capacity [Concrete]	22 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	50/30/13 mm
Operation Mode	Rotation/Hammering with rotation
Weight	2.5 kg
Length x Height	330 x 210 mm
Vibration Level	13.6 m/s ²



22MM 3 MODE SDS PLUS HAMMER

D25033K

Power Input	710W
Max. Impact Energy	2.1 J
Impact Energy (EPTA 05/2009)	2.0 J
No Load Speed	0-1550 rpm
Blows Per Minute	0-5680 bpm
Optimum Drilling Capacity [Concrete]	4-12 mm
Max. Drilling Capacity [Concrete]	22 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	50/30/13 mm
Operation Mode	Hammering/Rotation/Hammering with rotation
Weight	2.5 kg
Length x Height	330 x 210 mm
Vibration Level	13.6 m/s ²



26MM 3 MODE COMBINATION HAMMER, 2 KGS

D25133K

Power Input	800W
Max. Impact Energy	2.8 J
Impact Energy (EPTA 05/2009)	2.6 J
No Load Speed	0-1500 rpm
Blows Per Minute	0-5500 bpm
Optimum Drilling Capacity [Concrete]	4-14 mm
Max. Drilling Capacity [Concrete]	26 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	50/30/13 mm
Operation Mode	Hammering/Rotation/Hammering with rotation
Weight	2.6 kg
Length x Height	335 x 210 mm
Vibration Level	15.4 m/s ²



28MM 3 MODE SDS PLUS COMBINATION HAMMER, 2 KGS

D25143K

Power Input	900W
Max. Impact Energy	3.2 J
Impact Energy (EPTA 05/2009)	3.0 J
No Load Speed	0-1450 rpm
Blows Per Minute	0-5350 bpm
Optimum Drilling Capacity [Concrete]	4-18 mm
Max. Drilling Capacity [Concrete]	28 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	65/30/13 mm
Operation Mode	Hammering/Rotation/ Hammering with rotation
Weight	3.0 kg
Length x Height	340 x 210 mm
Vibration Level	14.9 m/s ²



30MM 3 MODE SDS PLUS COMBINATION HAMMER, 3KGS

D25333K

Power Input	950W
Max. Impact Energy	4.2 J
Impact Energy (EPTA 05/2009)	3.5 J
No Load Speed	0-1150 rpm
Blows Per Minute	0-5200 bpm
Optimum Drilling Capacity [Concrete]	6-20 mm
Max. Drilling Capacity [Concrete]	30 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	65/30/13 mm
Operation Mode	Hammering/Rotation/ Hammering with rotation
Weight	3.7 kg
Length x Height	355 x 250 mm
Vibration Level	6.9 m/s ²



32MM 3 MODE SDS PLUS COMBINATION HAMMER, 4KGS

D25413K

Power Input	1000W
Max. Impact Energy	4.9 J
Impact Energy (EPTA 05/2009)	4.2 J
No Load Speed	0-820 rpm
Blows Per Minute	0-4700 bpm
Optimum Drilling Capacity [Concrete]	6-22 mm
Max. Drilling Capacity [Concrete]	32 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	100/32/13 mm
Operation Mode	Hammering/Rotation/ Hammering with rotation
Weight	4.2 kg
Length x Height	370 x 250 mm
Vibration Level	8.2 m/s ²



40MM SDS MAX COMBINATION HAMMER, 5 KGS

D25481K

Power Input	1050W
Max. Impact Energy	7.3 J
Impact Energy (EPTA 05/2009)	6.1 J
No Load Speed	540 rpm
Blows Per Minute	3150 bpm
Optimum Drilling Capacity [Concrete]	16-30 mm
Max. Drilling Capacity [Concrete]	40 mm
Max. Drilling Capacity [Core bit]	100 mm
Operation Mode	Hammering/Rotation/ Hammering with rotation
Weight	5.9 kg
Length x Height	453 x 263 mm
Vibration Level	9.4 m/s ²



45MM SDS MAX COMBINATION HAMMER, 6 KGS

D25614K

Voltage	220-240 V
Frequency	50-60 Hz
No Load Speed	190-380 min-1
No-Load Beats Per Minute	1450-2900 bpm
Power Input	1350 W
Single Impact Energy (EPTA 05/2009)	10.5 J
Optimum Drilling Range Into Concrete	16-32 mm
Maximum Drilling Range In Concrete	45 mm
Maximum Core Drilling Range In Concrete	125 mm
Tool Holder	sds max
Weight	7.8 Kg



48MM SDS MAX HAMMER WITH ANTI ROTATION, 8 KGS

D25733K

Power Output	1600W
Max. Impact Energy	15.7 J
Impact Energy (EPTA 05/2009)	13.3 J
No Load Speed	177-355 rpm
Blows Per Minute	1350-2707 bpm
Optimum Drilling Capacity [Concrete]	24-42 mm
Max. Drilling Capacity [Concrete]	48 mm
Max. Drilling Capacity [Core bit]	125 mm
Operation Mode	Hammering/Hammering with rotation
Weight	9.2 kg
Length x Height	544 x 292 mm
Vibration Level	9.6 m/s ²



52MM SDS MAX HAMMER WITH ANTI ROTATION, 10 KGS

D25773K

Power Output	1700W
Max. Impact Energy	22.7 J
Impact Energy (EPTA 05/2009)	19.4 J
No Load Speed	145-290 rpm
Blows Per Minute	1105-2210 bpm
Optimum Drilling Capacity [Concrete]	28-45 mm
Max. Drilling Capacity [Concrete]	52 mm
Max. Drilling Capacity [Core bit]	135 mm
Operation Mode	Hammering/Hammering with rotation
Weight	10.5 kg
Length x Height	591 x 292 mm
Vibration Level	12.4 m/s ²



5KG SDS-MAX CHIPPING HAMMER

D25810K

Power Output	1050W
Max. Impact Energy	8.5 J
Impact Energy (EPTA 05/2009)	7.1 J
Blows Per Minute	3150 bpm
Chisel Positions	18
Weight	5.6 kg
Length x Height	462 mm x 263 mm
Vibration Level	8.5 m/s ²



5KG 17MM HEX CHIPPING HAMMER

D25811K

Power Output	1100W
Max. Impact Energy	8.5 J
Impact Energy (EPTA 05/2009)	7.1 J
Blows Per Minute	3150 bpm
Chisel Positions	18
Weight	5.7 kg
Length x Height	477 mm x 263 mm
Vibration Level	8.5 m/s ²



1700W 10KG L SHAPED DEMOLITION HAMMER

D25893K

Power Output	1700W
Max. Impact Energy	22.7 J
Impact Energy (EPTA 05/2009)	19.4 J
Blows Per Minute	1105-2211 bpm
Chisel Positions	12
Weight	10 kg
Length x Height	591 mm x 292 mm
Vibration Level	13.5 m/s ²



1500W 10KG SDS MAX DEMOLITION HAMMER, IN-LINE

D25899K

Power Output	1500W
Max. Impact Energy	19.5 J
Impact Energy (EPTA 05/2009)	17.9 J
Blows Per Minute	2040 bpm
Chisel Positions	12
Weight	9.5 kg
Length x Height	650 mm x 250 mm
Vibration Level	12.0 m/s ²



1500W 10KG SDS MAX DEMOLITION HAMMER, IN-LINE

D25901K

Power Input	1500W
Max. Impact Energy	20.7 J
Impact Energy (EPTA 05/2009)	19 J
Blows Per Minute	1020 - 2040 bpm
Chisel Positions	12
Weight	10.9 kg
Length x Height	690 x 250 mm
Vibration Level	8.0 m/s ²



1600W 12KG SDS MAX DEMOLITION HAMMER

D25951K

Power Output	1600W
Max. Impact Energy	30.1 J
Impact Energy (EPTA 05/2009)	24 J
Blows Per Minute	1621 bpm
Chisel Positions	12
Weight	13.6 kg
Length x Height	750 mm x 250 mm
Vibration Level	8.8 m/s ²



1600W 16KG DEMOLITION HAMMER

D25961K

Power Output	1600W
Max. Impact Energy	38 J
Impact Energy (EPTA 05/2009)	35 J
Blows Per Minute	1450 bpm
Chisel Positions	12
Weight	16.9 kg
Length x Height	760 mm x 260 mm
Vibration Level	6.8 m/s ²



2100W 30KG DEMOLITION BREAKER

D25981K

Power Output	2100W
Max. Impact Energy	72 J
Impact Energy (EPTA 05/2009)	62 J
Blows Per Minute	960 bpm
Chisel Positions	12
Weight	31 kg
Length x Height	780 mm x 620 mm
Vibration Level	4.8 m/s ²



1270W 110MM TILE SAW

DW862

Power Input	1270W
Blade Diameter	110 mm
Blade Bore Diameter	20 mm
No Load Speed	13500 rpm
Depth of Cut at 90°	34 mm
Weight	3.0 kg
Length x Height	252 x 166 mm



1700W 430MM ALLIGATOR SAW

DWE397

Power Input	1700W
No Load Stroke Rate	3000 spm
Stroke Length	40 mm
Blade Length	430 mm
Blade Stop	0.2s
Weight	5.5 kg
Length x Height	918 x 219 mm



2500W 3 SPEED WET DRILLING MOTOR

D21585

Power Input	2500W
Spindle Thread	1 1/4" Male UNC
No Load Speed	0-500/0-1200/0-2000 rpm
Max. Drilling Capacity [Concrete]	250 mm (wet)
Max. Drilling Capacity [Masonry]	300 mm
Weight	11.2 kg
Length x Height	570 x 160 mm



540W 6.3MM VSR TORQUE ADJUSTABLE SCREWDRIVER

DW268

Power Input	540W
Max. Torque	4-26 Nm
No Load Speed	0-2500 rpm
Max. Screw Diameter	6.3 mm
Bit Holder	6.35 mm (Hex)
Weight	1.3 kg
Length x Height	301 x 187 mm



540W 6.3MM VSR HIGH TORQUE ADJUSTABLE SCREWDRIVER

DW269

Power Input	540W
Max. Torque	4-26 Nm
No Load Speed	0-1000 rpm
Max. Screw Diameter	6.3 mm
Bit Holder	6.35 mm (Hex)
Weight	1.3 kg
Length x Height	301 x 187 mm



1/2" 440NM HEAVY DUTY IMPACT WRENCH

DW292

Power Input	710W
Max. Torque	440 Nm
No Load Speed	2200 rpm
Impacts Per Minute	2700 ipm
Weight	3.2 kg
Length x Height	292 x 216 mm



3/4" 440NM HEAVY DUTY IMPACT WRENCH

DW294

Power Input	710W
Max. Torque	440 Nm
No Load Speed	2200 rpm
Impacts Per Minute	2700 ipm
Weight	3.2 kg
Length x Height	292 x 216 mm



550W 10MM ROTARY DRILL

DWD014

Power Input	550W
Chuck Capacity	10 mm
No Load Speed	0-2800 rpm
Max. Drilling Capacity [Masonry]	0 mm
Max. Drilling Capacity [Wood]	10 mm
Max. Drilling Capacity [Metal]	28 mm
Spindle Thread	3/8" x 24 U.N.F
Weight	1.3 kg
Length x Height	215 x 170 mm



701W 10MM ROTARY DRILL WITH KEYLESS CHUCK

DWD112S

Power Input	701W
Chuck Capacity	10 mm
No Load Speed	0-2500 rpm
Max. Torque	10.9 Nm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Metal]	10 mm
Spindle Thread	1/2" x 20 U.N.F
Weight	1.8 kg
Length x Height	230 x 190 mm



550W PERCUSSION DRILL DRIVER 10MM KEYED CHUCK

DWD022

Power Input	550W
Capacity	10 mm
No Load Speed	0-2,800 min-1
No Load Impact	0-47,600 min-1
Max. Drilling Range [Masonry]	13 mm
Max. Drilling Range [Steel]	10 mm
Max. Drilling Range [Wood]	25 mm
Chuck Spindle Thread Size	1/2 in. x 20 UNF
Weight	1.4 kg



750W 13MM KEYED PERCUSSION DRILL

DWD024

Power Input	750W
Chuck Capacity	13 mm
No Load Speed	0-2800 rpm
Max. Torque	8.6 Nm
Blows Per Minute	47600 bpm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	16 mm
Weight	1.82 kg
Length x Height	255 x 180 mm



1100W 13MM 2 SPEED PISTOL PERCUSSION DRILL

DWD524KS

Power Input	1100W
Chuck Capacity	13 mm
Speed Settings	2 speed
No Load Speed	0-1250/0-3500 rpm
Max. Torque	40/20 Nm
Blows Per Minute	0-56000 bpm
Max. Drilling Capacity [Wood]	40 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	22 mm
Weight	2.8 kg
Length x Height	370 x 210 mm



100MM 850W SAG WITH TOGGLE SWITCH**DW801**

Power Input	850 W
Disc Diameter	100 mm
Switch Type	Toggle
No Load Speed	11000 rpm
Spindle Thread	M14
Weight	1.8 Kg
Length x Height	270 x 80 mm

**100MM 850W SAG WITH SLIDER SWITCH****DW802**

Power Input	850 W
Disc Diameter	100 mm
Switch Type	Slide
No Load Speed	11000 rpm
Spindle Thread	M14
Weight	1.8 Kg
Length x Height	270 x 80 mm

**100MM 1000W ANGLE GRINDER WITH TOGGLE SWITCH****DW803**

Power Input	1000 W
Disc Diameter	100 mm
Switch Type	Toggle
No Load Speed	10000 rpm
Spindle Thread	M14
Weight	1.8 Kg
Length x Height	270 x 80 mm



100MM 750W ANGLE GRINDER TOGGLE SWITCH**DW810**

Power Input	750 W
Disc Diameter	100 mm
Switch Type	Toggle
No Load Speed	11000 rpm
Spindle Thread	M14
Weight	1.67 Kg
Length x Height	270 x 80 mm

**1010W 100MM ANGLE GRINDER****DWE8300S**

Voltage	220-240 V
Power Input	1010 W
No-Load/Rated Speed	11000 min-1
Wheel Diameter	100 mm
Wheel Thickness (MAX)	4.0 mm
Spindle Diame	M10
Spindle Length	18.5 mm
Switch Style	Slide
Weight	1.85 Kg

**125MM 950W ANGLE GRINDER - SLIDE SWITCH****DWE4115**

Power Input	950W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	12000 rpm
Spindle Thread	M14
Weight	1.8 kg
Length x Height	270 x 80 mm



1400W 125MM ANGLE GRINDER

DW831


Power Input	1400W
Disc Diameter	125 mm
Switch Type	Trigger
No Load Speed	10000 rpm
Spindle Thread	M14
Weight	3.1 kg
Length x Height	290 x 80 mm



100MM 950W VARIABLE SPEED ANGLE GRINDER - SLIDE SWITCH

DWE4118


Power Input	950W
Disc Diameter	100 mm
Switch Type	Slide
No Load Speed	3 000–11 000 rpm
Spindle Thread	M14
Weight	1.8 kg
Length x Height	270 x 80 mm



125MM 950W ANGLE GRINDER - SLIDE SWITCH WITH VARIABLE SPEED

DWE4119

Power Input	950W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	3 000–11 000 rpm
Spindle Thread	M14
Weight	1.8 kg
Length x Height	270 x 80 mm



125MM 1200W ANGLE GRINDER - SLIDE SWITCH

DWE4215

Power Input	1200W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	11000 rpm
Spindle Thread	M14
Weight	2.2 kg
Length x Height	285 x 80 mm



125MM 1400W ANGLE GRINDER - SLIDE SWITCH

DWE4235

Power Input	1400W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	11500 rpm
Spindle Thread	M14
Weight	2.1 kg
Length x Height	285 x 80 mm



125MM 1700W BRUSHLESS ANGLE GRINDER - SLIDE SWITCH

DWE4347

Power Input	1700W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	10500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	2.39 kg
Length x Height	345 x 95 mm



125MM 1700W BRUSHLESS ANGLE GRINDER - VARIABLE SPEED

DWE4357

Power Input	1700W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	2200 - 10500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	2.41 kg
Length x Height	345 x 95 mm



125MM 1700W BRUSHLESS RAT TAIL ANGLE GRINDER - VARIABLE SPEED

DWE4377

Power Input	1700W
Disc Diameter	125 mm
Switch Type	Rat tail
No Load Speed	2200 - 10500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	2.6 kg



180MM 2200W ANGLE GRINDER

DWE493

Power Input	2200W
Disc Diameter	180 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.1 kg
Length x Height	484 x 112 mm



180MM 2200W ANGLE GRINDER

DWE497

Power Input	2600W
Disc Diameter	180 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.4 kg
Length x Height	490 x 145 mm



180MM 2200W ANGLE GRINDER

D28413


Power Input	2200W
Disc Diameter	180 mm
Switch Type	Paddle
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	4.7 kg
Length x Height	520 x 145 mm



180MM 2600W ANGLE GRINDER

DWE4597

Power Input	2600W
Disc Diameter	180 mm
Switch Type	Paddle
No Load Speed	8500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	5.8 kg
Length x Height	520 x 151 mm



230MM 2200W ANGLE GRINDER

DWE492

Power Input	2200W
Disc Diameter	230 mm
Switch Type	Trigger
No Load Speed	6600 rpm
Spindle Thread	M14
Weight	5.2 kg
Length x Height	490 x 151 mm



230MM 2600W ANGLE GRINDER

DWE496

Power Input	2600W
Disc Diameter	230 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.4 kg
Length x Height	490 x 145 mm



230MM 2600W ANGLE GRINDER

DWE4579

Power Input	2600W
Disc Diameter	230 mm
Switch Type	Paddle
No Load Speed	6500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	5.9 kg
Length x Height	520 x 145 mm



450W 6MM DIE GRINDER - PADDLE SWITCH**DWE487N**

Power Input	450W
Collet Size	6 mm
Switch Type	Paddle
No Load Speed 2	5000 rpm
Max. Wheel Diameter	38 mm
Spindle Thread	M15
Weight	1.6 kg
Length	356 mm

**450W 6MM DIE GRINDER - SLIDE SWITCH****DWE4884**

Power Input	450W
Collet Size	6 mm
Switch Type	Slide
No Load Speed	25000 rpm
Max. Wheel Diameter	38 mm
Spindle Thread	M15
Weight	1.6 kg
Length	356 mm

**1300W BRUSHLESS VARIABLE SPEED DIE GRINDER****DWE4997**

Power Input	1300 W
No Load Speed	7500-25000 min-1
Maximum Wheel Diameter 5	0 mm
Collet Size	6 mm
Weight	2.4 Kg



2200W 355MM HEAVY DUTY CHOP SAW

DW871

Power Input	2200W
Speed	3800 rpm
Wheel Diameter	355 mm
Max. Cutting Capacity at 90°	
[Square Profile]	120 x 105 mm
[Rectangular Profile]	72 x 230 mm
[L-Shape Profile]	92 x 92 mm
[Rounded Profile]	130 mm
Max. Cutting Capacity at 45°	
[Square Profile]	79 x 79 mm
[Rectangular Profile]	79 x 123 mm
[L-Shape Profile]	56 x 56 mm
[Rounded Profile]	79 mm
Weight	18 kg
Length x Height	520 x 435 mm



2300W 355MM INDUSTRIAL CHOP SAW

D28730

Power Input	2300W
No Load Speed	4000 rpm
Wheel Diameter	185 mm
Max. Cutting Capacity at 90°	
[Square Profile]	120 x 120 mm
[Rectangular Profile]	115 x 130 mm
[L-Shape Profile]	135 x 135 mm
[Rounded Profile]	130 mm
Max. Cutting Capacity at 45°	
[Square Profile]	102 x 102 mm
[Rectangular Profile]	110 x 102 mm
[L-Shape Profile]	110 x 110 mm
[Rounded Profile]	115 mm
Weight	15.5 kg
Length x Height	520 x 435 mm



2200W 355MM HEAVY DUTY CHOP SAW

D28870

Power Input	2200W
Speed	3800 rpm
Wheel Diameter	355 mm
Max. Cutting Capacity at 90°	
[Square Profile]	120 x 120 mm
[Rectangular Profile]	100 x 120 mm
[L-Shape Profile]	140 x 140 mm
[Rounded Profile]	130 mm
Max. Cutting Capacity at 45°	
[Square Profile]	105 x 105 mm
[Rectangular Profile]	100 x 140 mm
[L-Shape Profile]	120 x 120 mm
[Rounded Profile]	113 mm
Weight	18 kg
Length x Height	520 x 435 mm



1200W 50MM 2 SPEED MAGNETIC DRILL PRESS**DWE1622K**


Power Input	1200W
Speed Settings	2 speed
No Load Speed	300/450 rpm
Cutter Holder	19 mm Weldon shank (3/4")
Max. Cutting Depth with Cutters	50 mm
Max. Cutting Diameter with Cutters	50 mm
Drill Point Pressure	317 kg
Clamping Force	3800 N
Stroke Length	147 mm
Weight	14.55 kg
Magnetic Base Dimensions	180 x 84 mm

**1250W 150-180MM POLISHER - WITH VARIABLE SPEED****DWP849X**

Power Input	1250W
No Load Speed	0-600/0-3500 rpm
Max. Backing Pad Diameter	230 mm
Recommended Pad Diameter	150 - 180 mm
Spindle Thread	M14
Weight	3.0 kg
Length x Height	480 x 135 mm

**200MM 1000W 2 SPEED BAND SAW****DW876**

Power Input	1000W
Cutting Speed	380-880 m/min
Max. Cutting Height	200 mm
Max. Cutting Width	310 mm
Table Size	500 x 500 mm
Blade Length	2215 mm
Weight	54.0 kg
Length x Height	770 x 1590 mm



150MM 373W BENCH GRINDER**DW752R**

Power Input	373W
No Load Speed	2950 rpm
Wheel Diameter	152 mm
Wheel Thickness	15-17 mm
Bore Diameter	12.7-12.9
Grinder Wheel Speed	35m/s
Weight	13.8 kg
Length x Height	310 x 215 mm

**254MM COMPOUND MITRE SAW + 80T ALU BLADE****DW714**

Power Input	1650W
Blade Speed	4600 rpm
Blade Diameter	250 mm
Blade Bore Diameter	30 mm
Bevel Capacity	48/0 °
Mitre Capacity [right/left]	52/47 °
Cutting Capacity at 90°/90° (W x H)	130 x 68 mm
Cutting Capacity at 90°/45° (W x H)	130 x 40 mm
Cutting Capacity at 45°/90° (W x H)	91 x 68 mm
Max. Cutting Capacity at 45°/45°	91 x 40 mm
Max. Depth of Cut [Saws]	89 mm
Weight	13.1 kg
Length x Height	600 x 425 mm

**305MM 1600W SINGLE BEVEL MITRE SAW****DWS715**

Power Input	1600W
Blade Speed	4000 rpm
Blade Diameter	305 mm
Blade Bore Diameter	25.4 mm
Bevel Capacity	48/-3 °
Mitre Capacity [right/left]	50 / 50 °
Cutting Capacity at 90°/90° (W x H)	203 x 72 mm
Cutting Capacity at 90°/45° (W x H)	203 x 47 mm
Cutting Capacity at 45°/90° (W x H)	142 x 72 mm
Max. Cutting Capacity at 45°/45°	142 x 47 mm
Max. Depth of Cut [Saws]	99 mm
Weight	19 kg
Length x Height	770 x 396 mm



305MM 1675W SLIDE MITRE SAW - WITH VARIABLE SPEED**DWS780**

Power Input	1675W
Blade Speed	1900 - 3800 rpm
Blade Diameter	305 mm
Blade Bore Diameter	30 mm
Bevel Capacity	49°
Mitre Capacity [right/left]	60 / 50°
Cutting Capacity at 90°/90° (W x H)	345 x 76 mm
Cutting Capacity at 90°/45° (W x H)	244 x 76 mm
Cutting Capacity at 45°/90° (W x H)	268 x 63 mm
Max. Cutting Capacity at 45°/45°	212 x 76 mm
Max. Depth of Cut [Saws]	170 mm
Weight	24.8 kg
Length x Height	770 x 396 mm

**650W JIGSAW****DWE349**

Power Input	650 W
No Load Stroke Rate	800-3100 spm
Stroke Length	20 mm
Bevel Capacity	45 deg
Max. Depth of Cut (Wood)	85 mm
Max. Depth of Cut (Steel)	10 mm
Max. Depth of Cut (Non Ferrous Metal)	20 mm
Keyless Blade Change	Yes
Weight	3 kg
Length x Height	230 X 200 mm

**701W TOP HANDLE JIGSAW****DW331K**

Power Input	701W
No Load Stroke Rate	0-3100 spm
Stroke Length	26 mm
Bevel Capacity	45 °
Max. Depth of Cut (Wood)	130 mm
Max. Depth of Cut (Steel)	12 mm
Max. Depth of Cut (Non Ferrous Metal)	30 mm
Keyless Blade Change	Yes
Weight	2.6 kg
Length x Height	250 x 210 mm



1200W 185MM COMPACT CIRCULAR SAW

DWE561A

Voltage	220-240 V
Type	1
Power Input	1200 W
No-Load Speed	5500 min-1
Blade Diameter	184 mm
Max. Depth Of Cut At 90°	65 mm
Max. Depth Of Cut At 45°	42 mm
Blade Bore	20 mm
Bevel Angle Adjustment	8°
Weight	3.6 kg



1350W 184MM COMPACT CIRCULAR SAW

DWE560B

Power Input	1350W
No Load Speed	5500 rpm
Blade Diameter	184 mm
Blade Bore Diameter	16 mm
Bevel Capacity	48°
Max. Depth of Cut at 90°	65 mm
Max. Depth of Cut at 45°	42 mm
Weight	3.7 kg
Length x Height	286 x 226 mm



1/4" SHEET ORBITAL SANDER

DWE6411

Power Input	280W
Orbits Per Minute	14,000 opm
Orbit Size	1.6 mm
Paper Size	140 x 115 mm
Pad Size	108 x 115 mm
Weight	1.28 kg
Length x Height	160 x 135 mm




125MM RANDOM ORBIT PALM SANDER**DWE6421**

Power	280 W
DrlllVmin.	12000 opm
Dust Sealed Switch	Yes
Dust Collection	Tes
Tool Height	140mm
Weight	1.3 kg
Length x Height	

**900W 8MM (1/4") VARIABLE SPEED PLUNGE ROUTER****D26203**

Power Input	900W
No Load Speed	16000-27000 rpm
Variable Speed	Yes
Collet Size	6-8 mm
Plunge Stroke/Movement	55 mm
Max. Cutter Diameter	30 mm
Weight	2.9 kg
Length x Height	110 x 270 mm



550W 1.5MM HAND PLANER**D26676**

Power Input	550W
No Load Speed	17000 rpm
Max. Depth of Cut	1.5 mm
Rebating Depth	10 mm
Planer Width	82 mm
Shoe Length	309 mm
Drum Diameter	54 mm
Weight	2.72 kg
Length x Height	290 X 180 mm

**1100W VARIABLE SPEED RECIPROCATING SAW****DWE305PK**

Power Input	1100W
No Load Stroke Rate	0-2800 spm
Stroke Length	29 mm
Max. Cutting Capacity [Wood]	280 mm
Max. Cutting Capacity [Steel Sections & Pipes]	100 mm
Max. Cutting Capacity [PVC]	130 mm
Weight	3.5 kg
Length x Height	435 x 178 mm

**1800W PORTABLE PLANER THICKNESSER****DW733**

Power Input	1800W
No Load Speed	10000 rpm
Max. Capacity	64-315 mm (Width)
Max. Depth of Cut	3.2 mm
Max. Planing Depth	2 mm
Max. Thicknesser Capacity	152 mm (Height)
Feed Rate	8 m/min
Overload Protection	Yes
Weight	33.6 kg
Length x Height	520 x 445 mm



250mm 2000W LIGHTWEIGHT TABLE SAW**DWE7492**

Power Input	2000W
Blade Speed	4800 rpm
Blade Diameter	250 mm
Blade Bore Diameter	30 mm
Bevel Capacity -	3 to 48 °
Max. Ripping Capacity [right / left]	825 x 558 mm
Max. Depth of Cut at 90°	77 mm
Max. Depth of Cut at 45°	55 mm
Table Size	680x650 mm
Weight	26.5 kg
Depth	742 mm
Length x Height	577 x 425 mm

**2000W HEAT GUN WITH LCD DISPLAY****D26414**

Power Input	2000W
Operating Temperature	50 - 600 °C
Air Flow	650 l/min
Weight	0.85 kg
Length x Height	265 x 210 mm

**1800W STANDARD HEATGUN****D26411**


Power Input	1800W
Operating Temperature [Setting 1]	50 - 400 °C
Operating Temperature [Setting 2]	250 / 450 l/min
Weight	0.80 kg
Length x Height	253 x 210 mm



800W HEAVY DUTY INDUSTRIAL BLOWER

DWB800

Power Input	800W
Speed	0 - 16000 rpm
Air Volume	4.5 m ³ /min
Suction	2.5 m ³ /min
Weight	1.8 kg



1400W 38L CONSTRUCTION DUST EXTRACTOR - M CLASS

DWV902M

Power Input	1400W
Max. Airflow	4080 l/min
Capacity	38L
Wet Capacity	18.4L
Vacuum Class	M CLASS (99.9% dust >0.1 mg/m ³)
Hose Length / Diameter	4m / ø35 mm
Built-In Power Socket	Yes (Max. 2200W)
Weight	15 kg
Height	695 mm



1400W 38L CONSTRUCTION DUST EXTRACTOR - L CLASS

DWV901L

Power Input	1400W
Max. Airflow	4080 l/min
Capacity	30L
Wet Capacity	17.5L
Vacuum Class	L Class (99.9% dust >1 mg/m ³)
Hose Length / Diameter	4.1m / ø35 mm
Built-In Power Socket	Yes (Max. 2200W)
Weight	9.5 kg
Height	500 mm



HEAVY DUTY MITER SAW STAND

DWX723



Compact Length	1765 mm
Extended Length	3835 mm
Include Disclaimer	* Stand only. Tool only for illustration

STAND FOR DRILLING MOTOR

D215851



Column Length	995 mm
Max. Drilling Diameter with Water Collector	250 mm
Max. Drilling Diameter without Water Collector	300 mm
Inclinable	45°
Weight	7kg



DUST EXTRACTION SYSTEM & HOLE CLEANING

DWH050K



Product Fitment	All Cordless SDS-Plus and SDS-Max. Hammers
Nose Sizes	0-38 mm / 38-52 mm
Cleaning Nozzles	2 included
Weight	0.6 kg
Length x Height	361 x 57 mm

125MM SURFACE GRINDING SHROUD

DWE46150



Product Fitment	All 115 / 125 mm grinders
Max. Disc Diameter	125 mm
Accessories Accepted	Diamond Cups
Weight	0.3 kg



FLOOR CLEANING KIT

DWV9350

For use with DWV901 / DWV902



DUST EXTRACTION SYSTEM FOR SDS-PLUS HAMMERS

D25301D

Product Fitment	All SDS-Plus Hammers
Collar Diameter	ø43 mm / ø54 mm
Max. Bit Diameter	ø16 mm
Max. Bit Length	224 mm
Max. Drilling Depth	150 mm
Weight	1.2 kg



SDS PLUS DUST EXTRACTOR CORDED CORDLESS

D25304DH

Product Fitment	D25333K / D25334K / DCH333 / DCH334
Max. Drilling Capacity	ø26 mm
Max. Drilling Depth	180 mm
Weight	1.4 kg
Length x Height	440 x 296 mm





LASER INSTRUMENTS

Lasers	63
Laser Accessories	65
Laser Distance Measurer	66

10.8V/18V MAX 3x360°

Cross laser green level machine

Based on the DCE089D1G18 kit, this too lasts **1.8 times** longer than DCE089D1G (18V 2.0AH configuration)



10.8V/18V 3x360°
 Cross green laser
DCE089D1G18

* Battery operating time may vary in different working environments

**Handles delicate jobs**

Vertical lines can be fine-tuned with the fine adjustment dial.

**Excellent compatibility**

Laser leveler compatible with both 10.8V and 18V batteries.

**Accurate visibility**

High visibility with the 3 x 360° green laser.

**High-efficiency battery**

5.4 times (30 hours+) the operating time when using 18V 6.0AH battery.

12V MULTILINE LASER - RED BEAM

DCE089D1R

Beam Colour	Red
Accuracy	+/-3 mm @ 10m
Self-Levelling Range	+/-4°
Max. Working Range with Detector	20-50m
IP Rating	65
Number of Beams	3 - Horizontal, Vertical, Side
Tripod Connection	1/4" x 5/8"
Pendulum Lock	Yes
Laser Class	2
Modes	1 x 360° Horizontal, 1 x 360° Vertical, 2nd 360° Vertical



MULTI-BEAM 5 POINTS LASER POINTER + 1 BACKLINE

DW085K

Beam Colour	Red
Accuracy	+/- 3mm @ 15m
Self-Levelling Range	+/-4°
Indoor Visible Range	30 m
IP Rating	54
Number of Beams	5
Tripod Connection	1/4" (6.35mm)
Laser Class	2
Weight	3 kg



5 POINT LASER WITH CROSS BEAM - RED BEAM

DCE0825D1R

Beam Colour	Red
Accuracy	+/-3 mm @ 10m Spot +/-2 @ 10m
Self-Levelling Range	+/-4°
Max. Working Range Line/Spot	20m/50m
IP Rating	65
Number of Beams	7 - Cross Line plus 5 spots
Tripod Connection	1/4" x 5/8"
Pendulum Lock	Yes
Laser Class	2
Modes	Vertical Only, Horizontal Only, Cross Line, 3 Spot Only: Up, Down, Front, 5 Spot



12V MULTILINE LASER - GREEN BEAM

DCE088D1G

Beam Colour	Green
Accuracy	+/-3 mm @ 10m
Self-Levelling Range	+/-4°
Max. Working Range with Detector	30-50m
IP Rating	65
Number of Beams	3 - Horizontal, Vertical, Side
Tripod Connection	1/4" x 5/8"
Pendulum Lock	Yes
Laser Class	2
Modes	1 x 360° Horizontal, 1 x 360° Vertical, 2nd 360° Vertical



GREEN BEAM CROSS LINE LASER

DW088CG

Beam Colour	Green
Accuracy	+/-3 mm @ 10m
Self-Levelling Range	+/-4°
Max. Working Range with Detector	20-50m
IP Rating	54
Number of Beams	3 - Horizontal, Vertical, Side
Tripod Connection	5/8"
Laser Class	2
Modes	3 beams Separately 1 Horizontal, 2 Vertical
Power Source	4 x AA



3 BEAM LASER - MULTILINE

DW089K

Beam Colour	Red
Accuracy	+/-3 mm @ 10m
Self-Levelling Range	+/-4°
Max. Working Range with Detector	15-50m
Dust/Water Protection	IP54
Number of Beams	3 - Horizontal, Vertical, Side
Tripod Connection	5/8"
Rotation Speed	150, 300, 600, 1200rpm
Laser Class	2
Modes	Vertical, Horizontal, Cross Line, Spot Only Up, Down



CROSS LINE LASER - RED BEAM

DW088K

Beam Colour	Red
Accuracy	+/-3 mm @ 10m
Self-Levelling Range	+/-4°
Max. Working Range	15-50m
IP Rating	54
Number of Beams	2 - Horizontal, Vertical
Tripod Connection	1/4"
Laser Class	2
Modes	Vertical Only, Horizontal Only, Cross Line
Power Source	2 x AAA



MULTI-PURPOSE TRIPOD WITH TILTING HEAD

DW0881T

Adjustable Height	0.6 - 1.7m
Mounting Thread	1/4"
Material	Aluminium



RED LINE LASER DETECTOR

DE0892

Compatibility	DW088, DW089
Max. Working Range	50m
Power Source	1 x 9V



COMPATIBLE WITH:

DW088K-XJ / DW089K-XJ/ DCE089D1R-QW

GREEN LINE LASER DETECTOR

DE0892G

Compatibility	DW088CG, DCE088D1G, DCE089D1G, DCE0825D1G
Max. Working Range	50m
Power Source	1 x 9V



COMPATIBLE WITH:
DW088 / DW089

100M LASER DISTANCE METER (330FT)

DW03101

Accuracy	+/-1.5 mm @ 10m
Dust/Water Protection	IP65
Laser Class	2
Power Source	2 x AAA
Calculations	Distance, Area, Volume, Pythagoras, Timer Function, Inclinometer, Partial Height
Tool Connect Compatible	Yes



50 M LASER DISTANCE MEASURER (165 FT.)

DW0165N

Accuracy:	+/-0.2 mm @ 1m
Indoor Visible Range	30 m
IP Rating	54
Tripod Connection	1/4" (6.35mm)
Direction of beams	Up/down/level/square



30M LASER DISTANCE MEASURER

DWHT77100

Accuracy	+/-3 mm @ 10m
Measuring range	30m
Laser Class	2
Power Source	2 x AAA
Calculations	Area, Volume, Pythagoras
Measure unit	Metric/inch
Dust/Water Protection	IP40
Power source	2 x AAA



DEWALT POCKET LASER

DW055PL

Accuracy	+/-6mm @ 10m
Dust/Water Protection	IP54
Measuring range	16m
Laser Class	2
Power Source	Built-in, charge with USB
Measure unit	Metric/inch
Dimension	64.5x38x20.6mm





TOOLS STORAGE

TOUGHSYSTEM™

MULTI BOX

TSTAK™

TOUGH POUCH

SOFTBAG™

TSTAK SYSTEM STORAGE 70

DEWALT TOUGH SYSTEM 74

STORAGE
BUILT TO
HANDLE IT.™

GUARANTEED TOUGH.®

A new solution
for tough job sites

**Introducing
the Tough
System 2.0!**

DWST83402-1
TOUGH SYSTEM 2.0
A 3-in-1 module box

**A 20% wider storage
compartment**



Passed the IP65 test
Dust/moisture-proof



Easy to use
Auto-connecting side lock



* Compared to 1-70-321, 1-70-322, 1-70-323, and DWST08250.

* Compatible with the previous Tough System series.

TSTAK® IP54 DEEP BOX

DWST83346

Dimensions	440mm X 333mm X 302mm
Weight Capacity	30kg
Internal Volume	22.24L
Dust/Water Protection	IP 54



TSTAK® IP54 DEEP BOX LONG HANDLE

DWST83343

Dimensions	442mm X 338mm X 323mm
Weight Capacity	30kg
Internal Volume	22.24L
Dust/Water Protection	IP 54



TSTAK® IP54 MOBILE STORAGE BOX

DWST83347

Dimensions	512mm x 435mm x 1000mm Handle up
Weight Capacity	30 kg (top handle) / 50 kg (trolley)
Internal Volume	36L
Dust/Water Protection	IP 54



TSTAK® WATERSEALED ORGANISER

DWST82968

Dimensions	440mm x 337mm x 119mm
Storage Volume (Litres)	7.8L
Dust/Water Protection	IP54
Stackable	Yes
Inlay Product Type	Removable Cups



TSTAK® IP54 SHALLOW BOX

DWST83345

Dimensions	440mm X 333mm X 162mm
Weight Capacity	30kg
Internal Volume	13.5L
Dust/Water Protection	IP 54



TSTAK® IP54 SHALLOW BOX LONG HANDLE

DWST83344

Dimensions	440mm X 333mm X 183mm
Weight Capacity	30kg
Internal Volume	14L
Dust/Water Protection	IP 54



TSTAK CART

DWST1-71229

Dimensions	181 x 486 x 436mm
Product Material	ABS
Pack Size	Pack of 1
Case Type	Trolley
Load Capacity(Weight)	100kg
Wheeled	Yes



TSTAK DEEP DRAWER UNIT 1

DWST1-70705

Dimensions	440mm x 314mm x 176mm
Product Material	ABS
Pack Size	Pack of 1
Case Type	Box
Stackable	Yes



TSTAK DRAWER UNIT 2

DWST1-70706

Dimensions	430mm x 315mm x 176mm
Product Material	ABS
Pack Size	Pack of 1
Case Type	Box
Stackable	Yes



TSTAK OPEN TOTE**DWST1-71228**

Dimensions	320mm x 275mm x 440mm
Product Material	ABS
Pack Size	Pack of 1
Case Type	Tote
Stackable	Yes

**TSTAK TROLLEY****DWST1-71196**

Dimensions	580mm x 540mm x 1040.3mm
Capacity	100 Kg

**DEWALT TSTAK CLIPBOARD****DWST82732-1**

Dimensions	41.5 x 28.5 x 3.5 mm
LED Light	Yes
Internal Soft Pouch	Yes
Stackable	Yes



TOUGHSYSTEM 2.0 DS166 BOX

DWST83293-1

Dimensions	490mm x 117mm x 300mm
Waterseal	IP65 Rated Seal
Latches	Metal Wire
Weight Capacity	50kg
Internal Volume	22.15L
Top Handle	Yes
Side Bracket compatible	Yes



TOUGHSYSTEM 2.0 DS300 BOX

DWST83294-1

Dimensions	490mm x 252mm x 300mm
Waterseal	IP65 Rated Seal
Latches	Metal Wire
Weight Capacity	50kg
Internal Volume	43.45L
Top Handle	Yes
Side Bracket compatible	Yes



TOUGHSYSTEM 2.0 DS400 BOX

DWST83342-1

Waterseal	Visible IP65 Seal
Latches	Metal Wire
Weight Capacity	50kg
Internal Volume	59.95L
Top Carry Handle	Yes
Detachable Handle	Yes



TOUGHSYSTEM 2.0 DS450 MOBILEBOX

DWST83295-1

Waterseal	Visible IP65 Seal
Latches	Metal Wire
Weight Capacity	113kg
Internal Volume	64.75L
Top Handle	50kg
Protection Class	Yes
Side Bracket compatible	Yes



TOUGH SYSTEM 2.0 DEEP FULL SIZE ORGANIZER

DWST83394-1

Dimensions	543mm x 350mm x 100mm
Product Material	Plastic
Dust/Water Protection	IP65



TOUGHSYSTEM 2.0 DEEP TRAY

DWST83408-1

Internal Dimensions	470mm x370 mm x 120mm
Product Material	Plastic



TOUGHSYSTEM 2.0 SHALLOW TRAY

DWST83407-1

Internal Dimensions	470mm x370 mm x 60mm
Product Material	Plastic






ACCESSORIES & PARTS

Bonded Abrasive	78	CHISELS - PROFESSIONAL	87
Coated Abrasive	79	CHISELS - EXTREME	87
Marble Cutting Blade	80	METAL MAX	88
TURBO / PROCLEAN Wheels	80	CORE BITS	88
CUP Wheels/ WIRE Brush		ANNULAR/ BROACH CUTTERS	89
CSB	81	JIGSAW BLADES	90
MASONRY BITS	81	RECIPSAW	90
SDS PLUS- Professional	82	PROMO-LINE/COMBINATION SETS	91
SDS PLUS- EXTREME	83	SCREWDRIVER BITS	92
SDS MAX -2 Cutter	84	NUT DRIVERS	93
SDS MAX -4 Cutter	85-86	Multi Tool Accessories	93
SDS MAX -XLR SERIES	86	Nails & Fastening	94
		OTHER ACCESSORIES	94
		FASTENERS	95

INTRODUCTION TO BONDED ABRASIVES

DEWALT Abrasive Product Identification

DEWALT utilizes an industry recognized color coding and identification system to help users identify the right bonded abrasive wheel for their application. There are also several other key identifiers to look for on a wheel; RPM's, wheel size, thickness and bore size to ensure the correct product is used.

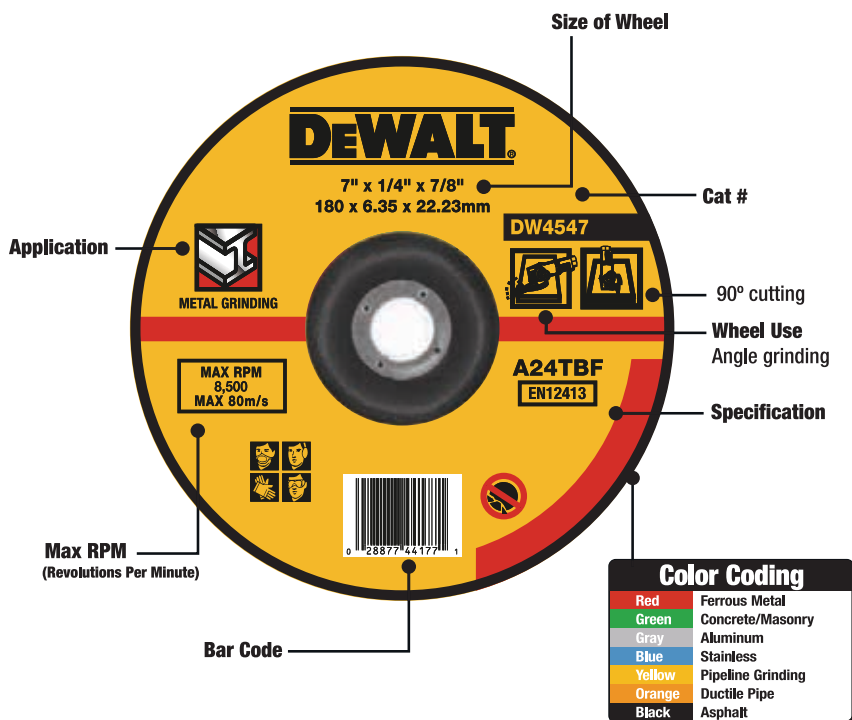


American National Standards Institute (ANSI)


A			
Primary grain used to make the wheel			
A	Aluminum Oxide		
TA	Treated Aluminum Oxide		
C	Silicon Carbide		
Z	Aluminum Zirconia		
24			
Size of the abrasive grain			
Coarse	Medium	Fine	Very Fine
16	30	100	220
20	36	120	240
24	46	180	280
	60		
R			
Hardness of the bond			
Soft Medium Hard			
A N R T Z			
BF			
Type of bond used			
B	Resinoid		
BF	Resinoid Reinforced		
RF	Rubber Reinforced		
S	Silicate		
V	Vitrified		

Types of Bonded Abrasives

Cutting & Edge Grinding




Angle Grinding at Shallow Angles



0°-15°


Angle Grinding & Edge Grinding



15°-25°



Surface Grinding



0°-15°

BONDED ABRASIVES

DEPRESSED CENTRE


Grinding Wheels

- High grain concentration for aggressive grinding action and smooth running wheels
- Proprietary material mix ensures durable long life wheels
- Three sheets of fiberglass for durability

METAL

- Aluminum oxide grain.
- Softer formulation than High Performance for fast grinding.
- General purpose metal grinding.

FERROUS METAL
STAINLESS STEEL

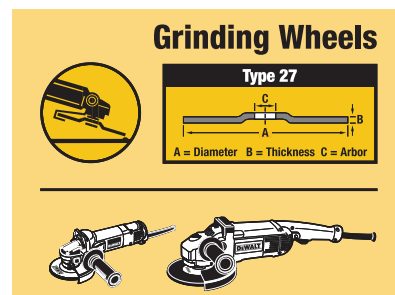

DEWALT DEPRESSED CENTRE METAL GRINDING WHEELS

Cat #	Type	Diameter (mm)	Thickness (mm)	Bore Size (mm)	Specification	Max RPM	PKS
DT34404	27	100	4,0	16	Metal	15200	25
DWA4500-IN (Red)	27	100	5,0	16	Metal	13750	30
DT34406	27	100	6,0	16	Metal	15200	25
DW4543	27	125	6,0	22.2	Metal	12200	25
DW4547-IN	27	180	6,3	22.2	Metal	8500	40
DWA4547-IN (Red)	27	180	6,7	22.2	Metal	8500	25
DW4549	27	230	6	22.2	Metal	6600	10

BONDED ABRASIVES

CUT-OFF WHEELS


Cutting Wheels

- Thin wheel design for fast burr free cutting.
- Proprietary material mix ensures durable long life wheels.
- Two sheets of fiberglass for durability & safety.

METAL

- Aluminum oxide grain.
- Softer formulation than High Performance for fast cutting.
- Cutting in all types of ferrous metals and stainless metals.
- Fast burr free cutting.

FERROUS METAL
STAINLESS STEEL

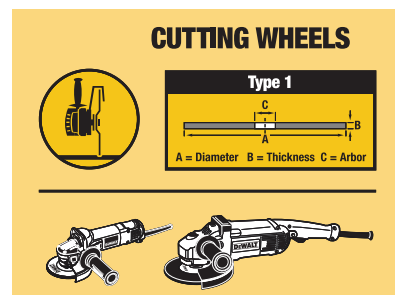

DEWALT CUT-OFF WHEELS

Cat #	Type	Diameter (mm)	Thickness (mm)	Bore Size (mm)	Specification	Max RPM	PKS
DWA8060-IN	1	100	1.2	16	Metal & Stainless Steel	15200	100
DWA8051-IN	1	100	1.8	16	Metal	13300	50
DWA4520F	1	100	2.8	16	Metal	13750	200
DWA8062-IN	1	125	1.2	22.2	Metal & Stainless Steel	12200	100
DWA8052	1	125	1.6	22.2	Metal & Stainless Steel	12200	100
DWA4522	1	125	3	22.2	Metal	12200	200
DWA8922-IN	1	180	1.6	22.2	Metal & Stainless Steel	8500	50
DWA4524F	1	180	3.0	22.2	Metal	8500	100
DW44560	1	180	3.2	22.2	Metal	8500	100
DWA4525IA-AE	1	230	3	22.2	Metal	6650	50
DWA8011R	1	355	2.8	25.4	Metal	3870	25
DWA8011RFCIA-B1	1	355	3	25.4	Metal	3875	10
DWA8011S-IN (Smooth)	1	355	2.8	25.4	Metal	4800	25

COATED ABRASIVE

FIBER SANDING DISC

Cat #	Type	Diameter (mm)	Bore Size (mm)	Specification	PKS
D32-IN	Aluminium Oxide	100	16	36	10
D34-IN	Aluminium Oxide	100	16	60	10
D35-IN	Aluminium Oxide	100	16	80	10
D36-IN	Aluminium Oxide	100	16	120	10
D22-IN	Aluminium Oxide	125	22.2	36	10
D24-IN	Aluminium Oxide	125	22.2	60	10
D25-IN	Aluminium Oxide	125	22.2	80	10
D26-IN	Aluminium Oxide	125	22.2	120	10
D2-IN	Aluminium Oxide	180	22.2	36	10
D4-IN	Aluminium Oxide	180	22.2	60	10
D5-IN	Aluminium Oxide	180	22.2	80	10
D6-IN	Aluminium Oxide	180	22.2	120	10
DZC32-IN	Zirconium	100	16	36	10
DZC33-IN	Zirconium	100	16	60	10
DZC22-IN	Zirconium	125	22.2	36	10
DZC23-IN	Zirconium	125	22.2	60	10
DZC2-IN	Zirconium	180	22.2	36	10
DZC3-IN	Zirconium	180	22.2	60	10
DZC9-IN	Zirconium	180	22.2	80	10
DZC10-IN	Zirconium	180	22.2	120	10
ZIRCON-IN-PROMO	Zirconium	100,125,180 Mixed Sizes			
ALCON-IN-PROMO	Aluminium Oxide	100,125,180 Mixed Sizes			



- Tough fiber backing to prevent tearing
- Proprietary material mix ensuring durability
- High performance for faster sanding

Available from 24G to 120G in 4", 5" & 7"



Aluminium Oxide

Zirconium

MARBLE CUTTING BLADES, TURBO GRINDING WHEELS & WIRE BRUSH

For Use with Marble Cutters & Angle Grinders

FEATURES

- High diamond concentration for long life and aggressive material removal.
- Large grinding segments with heat treated steel bodies which provides increases durability and wheel life.



MARBLE CUTTING BLADES & TURBO GRINDING WHEELS

Cat #	Description	Diameter (mm)	Bore (mm)	Pack Qty.
DW47402M-IN	4" MCB - 110mm x 20 (Segment Height 10 mm) for Marble	110	16/20	1
DW47401M-IN	4" MCB - 110mm x 20 Continuous (Segment Height 9 mm) for Marble	110	16/20	1
DW47402G-IN	4" MCB - 110mm x 20 (Segment Height 10 mm) for Granite	110	16/20	1
DW47502M-IN	5" MCB - 125mm x 22.23 (Segment Height 10 mm) for Marble	125	22,2	1
DW47502G-IN	5" MCB - 125mm x 22.23 (Segment Height 10 mm) for Granite	125	22,2	1
DW47402MB25-IN	Bulk Pack 25pc -4" MCB - 110mm x 20 for Marble	125	16/20	25
DW47401MB25-IN	Bulk Pack 25pc -4" MCB - 110mm x 20 Continuous for Marble	110	16/20	25
DW47402GB25-IN	Bulk Pack 25pc -4" MCB - 110mm x 20 for Granite	110	16/20	25
DW47502MB25-IN	Bulk Pack 25pc -5" MCB - 125mm x 22.23 for Marble	125	22,2	25
DW47502GB25-IN	Bulk Pack 25pc -5" MCB - 125mm x 22.23 for Granite	125	22,2	25
DX3101	PORCELAIN TILES Thin Cutter 100X1.2X 20mm (Industrial Grade)	100	20	1
DX3121	PORCELAIN TILES Thin Cutter 115X1.2X 22.23mm (Industrial Grade)	115	22,2	1
DX3161	PORCELAIN TILES Thin Cutter 180X1.4X 22.23mm (Industrial Grade)	180	22,2	1
DX3781	9" MCB - 230mm X 22.23 mm- LASER BLADE CONCRETE	230	22,2	1
DX4061	180 MM TURBO GRINDING WHEEL FOR CONCRETE	180	22,2	1
DX4001	100MM TURBO GRINDING WHEELS FOR CONCRETE	100	16	1



WIRE BRUSHES & CUP WHEELS

Cat #	Diameter (mm)	Bore (mm)	Wire Length (mm)	Pack Qty.
DT3500-QZ	65	M14	18	1
DT3489-QZ	100	M14	26	1
DT3501-QZ	100	M14	24	1
DT3502-QZ	115	M14	x	1
DW4772T-AE	100	22,2	x	1
DW4774T-AE	115	22,2	x	1
DW4777T-AE	125	22,2	x	1
DW4775T-AE	180	22,2	x	1

CIRCULAR SAW BLADES

Circular Saw Blades - Aluminum

Applications - Burr free aluminum cutting

FEATURES

- 12% titanium carbide provides long life in metal cutting
- Modified ATB tooth geometry provides clean, burr-free cuts
- Expansion slots dissipate heat which extends blade life



CIRCULAR SAW BLADES - ALUMINUM

Cat #	Description	Bore (mm)	Out Diameter	Teeth
DW03210-IN	Saw Blade 10" 100T Aluminum	25,4	254	80
DW03220-IN	Saw Blade 12" 80T Aluminum	25,4	254	100
DW03225-IN	Saw Blade 10" 120T Aluminum	25,4	254	120
DW03230-IN	Saw Blade 12" 80T Aluminum	25,4	305	80
DW03240-IN	Saw Blade 12" 100T Aluminum	25,4	305	100
DW03245-IN	Saw Blade 12" 120T Aluminum	25,4	305	120
DW03250-IN	Saw Blade 14" 80T Aluminum	25,4	354	80
DW03260-IN	Saw Blade 14" 100T Aluminum	25,4	354	100
DW03265-IN	Saw Blade 14" 120T Aluminum	25,4	354	120

Circular Saw Blades - Wood

Applications - Cutting plywood, MDF, particle boards, laminated boards & soft wood

FEATURES

- Advanced tooth geometry for chip free cutting.
- Tighter dimensional tolerances ensure smooth cutting.



CIRCULAR SAW BLADES - WOOD WORKING

Cat #	Description	Bore (mm)	Out Diameter	Teeth
DW03430-IN	TCT Saw Blade 4" 30 T Wood	16	110	30
DW03410-IN	TCT Saw Blade 4" 40 T Wood	20	110	40
DW03540-IN	TCT Saw Blade 5" 40 T Wood	20	125	40
DT4062-B1	TCT Saw Blade 7 1/4" 40 T Wood	20	185	40
DW03760-IN	TCT Saw Blade 7 1/4" 60 T Wood	20	185	60
DT99563-QZ	XR- Xtreme Series 190MM X 30MM Bore X 36T CSB	30	190	36
DT99564-QZ	XR- Xtreme Series 190MM X 30MM Bore X 60T CSB	30	190	60

SDS PLUS ECONOMY DRILL BITS

SDS PLUS ECONOMY DRILL BITS

Applications

- Suitable for fast drilling of plug, anchor or clearance holes in masonry, stone, concrete and brick/block work.

FEATURES

- 2X more carbide in tip for 2X longer drilling life in rebar-reinforced concrete.
- Tapered core technology to increase strength and resist flute breaks especially when drilling deep holes.
- 2-stage flute design with a variable helix pattern quickly moves debris away from the contact zone to increase drilling speed.
- Two sharp cutting edges deliver true holes for secure anchor installations.
- Optimal groove design minimizes friction for increased speed and longer life.



SDS PLUS ECONOMY DRILL BITS

Cat #	Diameter (mm)	Length (mm)	Working Length (mm)
DT9504-QZ	5	100	50
DT9505-QZ	5	160	100
DT9514-QZ	6	110	20
DT9515-QZ	6	160	100
DT9520-QZ	6,5	110	50
DT9519-QZ	6,5	160	100
DT9525-QZ	7	160	100
DT9528-QZ	8	110	50
DT9529-QZ	8	160	100
DT9539-QZ	10	110	50
DT9540-QZ	10	160	100
DT9541-QZ	10	210	150
DT9542-QZ	10	260	200
DT9553-QZ	12	160	100
DT9552-QZ	12	200	150
DT9554-QZ	12	260	200
DT9555-QZ	12	300	250
DT9566-QZ	14	160	100
DT9578-QZ	16	160	100
DT9580-QZ	16	260	200
DT9581-QZ	16	300	250
DT9582-QZ	16	450	400
DT9590-QZ	18	450	400
DT9599-QZ	20	450	400
DT9604-QZ	22	450	400
DT9610-QZ	24	450	400



SDS PLUS EXTREME DEWALT DRILL BITS

SDS Plus Extreme DEWALT Drill Bits

Applications

- Suitable for fast drilling of plug, anchor or clearance holes in masonry, stone, concrete and brick/block work.

FEATURES

- The innovative EXTREME DEWALT SDS-Plus drill bit is amongst the very best in terms of its durability drilling life and speed.
- The Superior carbide grade ensures a tip with outstanding durability which gives consistent drilling life.
- The NEW 4 FLUTE SPIRAL incorporates a maximized central core for increased durability and energy transmission.
- The 140° tip design ensures better bit penetration and longer life.
- Hardened Steel body for extra strength and reduced breakage.



SDS PLUS EXTREME DRILL BITS

Cat #	Diameter (mm)	Length (mm)	Working Length (mm)
DW00701-B1	5	110	45
DW00702-B1	6	110	50
DW00703-B1	6	160	100
DW00705-B1	8	110	50
DW00706-B1	8	160	100
DW00707-AE	8	210	150
DW00708-B1	10	110	50
DW00709-B1	10	160	100
DW00710-AE	10	210	150
DW00712-B1	12	160	100
DW00736-AE	12	200	150
DW00739-AE	12	260	200
DW00713-B1	12	460	400
DW00716-AE	14	160	100
DW00717-B1	16	160	100
DW00718-AE	16	200	150
DW00719-AE	16	300	240
DW00720-AE	15	460	400
DW00721-AE	18	200	150
DW00725-AE	20	200	150
DW00726-B1	20	300	250
DW00727-AE	20	460	400



SDS Max Drill Bits

Applications

- For use with SDS-Max drive hammer drills for anchor fixing or clearance holes in masonry concrete, brick or block work.

FEATURES

- Full Head Carbide with 2 cutters breaks up the hardest concrete with ease.
- 4 flute spiral with maximum flute entry enables faster debris removal.
- Maximised central core enables more efficient energy transmission to the drill bit head.
- Fully supported carbide head gives longer life and cleaner, more concentric holes for better fixing retention.
- Open head design ensures faster drilling.



SDS MAX DRILL BITS – 2 CUTTER					
Cat #	Diameter (mm)	Length (mm)	Working Length (mm)	Cutters	Pack Qty.
DT9400-QZ	12	340	200	2	1
DT9401-QZ	12	540	400	2	1
DT9405-QZ	14	340	200	2	1
DT9406-QZ	14	540	400	2	1
DT60200-XJ	16	340	200	2	1
DT60201-XJ	16	540	400	2	1
DT60202-XJ	18	340	200	2	1
DT60203-XJ	18	540	400	2	1
DT60204-XJ	20	340	200	2	1
DT60205-XJ	20	540	400	2	1
DT60206-XJ	22	340	200	2	1
DT60207-XJ	22	540	400	2	1
DT60208-XJ	24	340	200	2	1
DT60209-XJ	24	540	400	2	1
DT60210-XJ	25	340	200	2	1
DT60211-XJ	25	540	400	2	1
DT60212-XJ	26	340	200	2	1
DT60213-XJ	26	540	400	2	1
DT60214-XJ	28	380	250	2	1
DT60215-XJ	28	570	450	2	1
DT60216-XJ	28	670	550	2	1
DT60217-XJ	30	380	250	2	1
DT60218-XJ	30	570	450	2	1
DT60219-XJ	32	380	250	2	1
DT60220-XJ	32	570	450	2	1

SDS MAX DRILL BITS - 4 CUTTER

PROFESSIONAL RANGE

SDS Max Drill Bits

Applications

- For use with SDS-Max drive hammer drills for anchor, fixing or clearance holes in masonry concrete, brick or block work.

FEATURES

- 4 flute spiral with maximum flute entry enables faster debris removal.
- Maximised central core enables more efficient energy transmission to the drill bit head.
- Fully supported carbide head gives longer life and cleaner, more concentric holes for better fixing retention.
- Open head design ensures faster drilling.
- IRON BLAST TECHNOLOGY strengthens the bit to increase fatigue resistance and minimize breaks.
- Full Head Carbide with four cutters breaks up the hardest concrete with ease and provides 2X longer life in Hard Concrete.
- Single-piece, Tungsten Carbide tip with redesigned head geometry is bonded securely to a high alloy steel body to remain stable under high impact forces.



SDS MAX DRILL BITS – 4 CUTTER

Cat #	Diameter (mm)	Length (mm)	Working Length (mm)	Cutters	Pack Qty.
DT9409-QZ	16	340	200	4	1
DT9410-QZ	16	540	400	4	1
DT9411-QZ	18	340	200	4	1
DT9412-QZ	18	540	400	4	1
DT9414-QZ	19	540	400	4	1
DT9415-QZ	19	670	550	4	1
DT9416-QZ	20	340	200	4	1
DT9417-QZ	20	540	400	4	1
DT9419-QZ	22	340	200	4	1
DT9420-QZ	22	540	400	4	1
DT9422-QZ	24	340	200	4	1
DT9423-QZ	24	540	400	4	1
DT9424-QZ	25	340	200	4	1
DT9425-QZ	25	540	400	4	1
DT9427-QZ	26	340	200	4	1
DT9428-QZ	26	540	400	4	1
DT9429-QZ	28	380	250	4	1
DT9430-QZ	28	570	450	4	1
DT9431-QZ	28	670	550	4	1
DT9432-QZ	30	380	250	4	1
DT9433-QZ	30	570	450	4	1
DT9434-QZ	32	380	250	4	1
DT9435-QZ	32	570	450	4	1
DT9436-QZ	32	920	800	4	1

SDS MAX DRILL BITS - 4 CUTTER

PROFESSIONAL RANGE

SDS Max Drill Bits

Applications

- For use with SDS-Max drive hammer drills for anchor, fixing or clearance holes in masonry concrete, brick or block work.

FEATURES

- 4 flute spiral with maximum flute entry enables faster debris removal.
- Maximised central core enables more efficient energy transmission to the drill bit head.
- Fully supported carbide head gives longer life and cleaner, more concentric holes for better fixing retention.
- Open head design ensures faster drilling.
- IRON BLAST TECHNOLOGY strengthens the bit to increase fatigue resistance and minimize breaks.
- Full Head Carbide with four cutters breaks up the hardest concrete with ease and provides 2X longer life in Hard Concrete.
- Single-piece, Tungsten Carbide tip with redesigned head geometry is bonded securely to a high alloy steel body to remain stable under high impact forces.



SDS MAX DRILL BITS – 4 CUTTER					
Cat #	Diameter (mm)	Length (mm)	Working Length (mm)	Cutters	Pack Qty.
DT9437-QZ	35	380	250	4	1
DT9438-QZ	35	570	450	4	1
DT9439-QZ	35	670	550	4	1
DT9440-QZ	36	570	450	4	1
DT9441-QZ	38	380	250	4	1
DT9442-QZ	38	570	450	4	1
DT9443-QZ	38	670	550	4	1
DT9444-QZ	40	380	250	4	1
DT9445-QZ	40	570	450	4	1
DT9446-QZ	40	920	800	4	1
DT9448-QZ	45	570	450	4	1
DT9449-QZ	50	570	450	4	1
DT9450-QZ	52	570	450	4	1

SDS MAX BITS -XLR SERIES (EXTREME)					
Cat #	Diameter (mm)	Length (mm)	Working Length (mm)	Cutters	Pack Qty.
DT60800-QZ	12	340	210	4	1
DT60805-QZ	14	340	210	4	1
DT60832-QZ	30	380	250	4	1
DT60834-QZ	32	380	250	4	1
DT60844-QZ	40	380	250	4	1
DT60845-QZ	40	570	450	4	1



DEMOLITION CHISELS


Demolition Chisels

- Heavy duty chiseling and demolition task in concrete, stone (medium hardness), floor and wall tiles and general masonry.
- Wide range of chisels.
- Specially toughened steel and micro-processor controlled heat treatment ensures consistent tough chisels with longer life.



DEMOLITION CHISELS

Cat #	Fitment	Shape	Description	Category
DT6905-B1	17 mm Hex	Pointed	17 mm HEX POINTED CHISEL - 400 mm	CHISELS -PROFESSIONAL
DT6902-B1	17 mm Hex	Flat	17 mm HEX FLAT CHISEL – 400 mm	CHISELS -PROFESSIONAL
DWA0805-IN	18mm SDS Max	Pointed	18 mm X 400 SDS MAX CHISEL Pointed	CHISELS -PROFESSIONAL
DWA0807-IN	18mm SDS Max	Flat	18 mm X 400 X 25 mm SDS MAX CHISEL FLAT	CHISELS -PROFESSIONAL
DWA0805B10	18mm SDS Max	POINTED	18X 400mm SDS MAX Pointed (Bulk Pack-10pc)	CHISELS -PROFESSIONAL
DWA0807B10	18mm SDS Max	Flat	18X 400mm SDS MAX FLAT CHISEL(Bulk Pack -10pc)	CHISELS -PROFESSIONAL
DT6821-QZ	18mm SDS Max	Pointed	18 MM X 400MM SDS MAX Pointed	CHISELS -EXTREME
DT6823-QZ	18mm SDS Max	Flat	18 MM X 400MM X 25 mm SDS MAX FLAT	CHISELS -EXTREME
DT8087-QZ	18mm SDS Max	Pointed	18 mm SDS MAX CHISEL 600MM POINT	CHISELS -EXTREME
DT8088-QZ	18mm SDS Max	Flat	18 mm SDS MAX CHISEL 600X 25mm FLAT	CHISELS -EXTREME
DWA0809-IN	19 mm Hex	Pointed	19 mm X 400 mm HEX POINTED CHISEL	CHISELS -PROFESSIONAL
DT6942-QZ	19 mm Hex	Flat	19 MMX 400 mm X 25 mm HEX FLAT CHISEL	CHISELS -EXTREME
DT6940-QZ	19 mm Hex	Pointed	19 mm X 400 MM HEX CHISEL POINTED	CHISELS -EXTREME
DWA0810-IN	19 mm Hex	Pointed	19 mm X 600 mm HEX POINTED CHISEL	CHISELS -PROFESSIONAL
DWA0810B10	19 mm Hex	Pointed	19 mm X 600mm Hex Pointed (Bulk Pack-10pc)	CHISELS -PROFESSIONAL
DT6941-QZ	19 mm Hex	Pointed	19 mm X 600 MM HEX CHISEL POINTED	CHISELS -EXTREME
DT6943-QZ	19 mm Hex	Flat	19 mm X 600 mm X 25 mm HEX FLAT CHISEL	CHISELS -EXTREME
DT6927-QZ	28 mm Hex	Pointed	28 mm X 400 mm Hex Chisel Pointed	CHISELS -EXTREME
DT6929-QZ	28 mm Hex	Flat	28 mm X 350 mm X 25 mm HEX FLAT CHISEL	CHISELS -EXTREME
DT6808-QZ	30 mm Hex	Pointed	30 mm HEX X 410mm Pointed Chisel for 16kg hammer	CHISELS -EXTREME
DT6838-QZ	45 mm SDS MAX	Bush Hammer	45 mm BUSH HAMMER CHISEL SDS MAX STEEL-240 mm	CHISELS -EXTREME

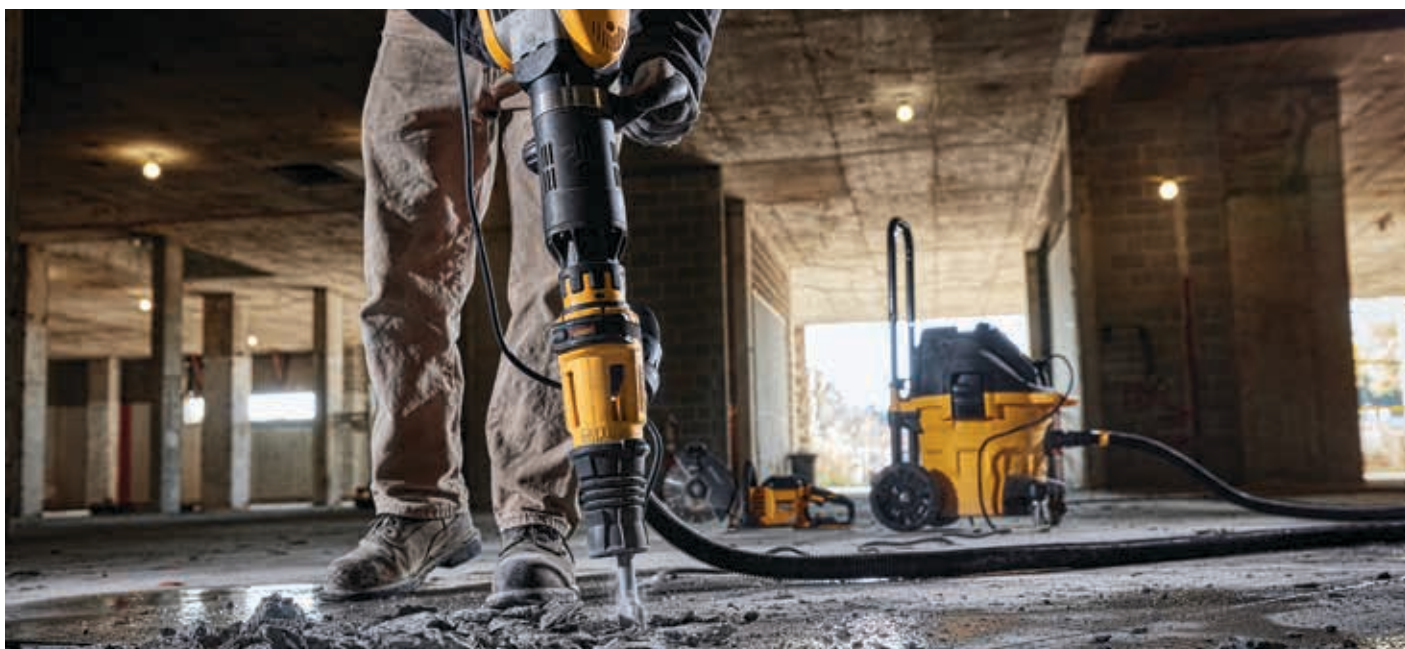


DIAMOND EDGE CHOP SAW BLADE

HIGH PERFORMANCE RANGE

Diamond Edge Chop Saw Blade FERROUS METAL

STATIONARY & CHOPSAW



- 100X the life verses standard chop saw wheel
- Advanced brazing technology cuts metal with the speed of conventional abrasive wheel
- Steel blade core provides constant cutting depth, capacity an stability of solid core
- Ideal for metal cutting
- Also cuts concrete, plastic, fiberglass, rubber, non-ferrous metals and other soft materials without loading



DeWALT CHOPSAW WHEELS							
Cat #	Type	Diameter (mm)	Thickness (mm)	Bore Size (mm)	Specification	Max RPM	PKS
DW8500	1	355	4.0	25.4	Metal - 100X Life	4,300	3

Materials



PIPE




STEEL STUDS



ANGLE IRON



REBAR



THREADED ROD

EXTRE METAL MAX DIAMOND BLADES						
Cat #	Diameter (mm)	Bore Size (mm)	Description	Life	Pack Qty.	
DW8540-IN	100	16	EXTREME METAL DIAMOND CUTOFF 4" AGX 30X Life	30X	1	
DW8545-IN	115	22,2	EXTREME METAL DIAMOND CUTOFF 4.5" AGX 30X Life	30X	1	
DW8570-IN	180	22,2	EXTREME METAL DIAMOND CUTOFF 7" AG X 30X Life	30X	1	
DW8590-IN	230	22,2	EXTREME METAL DIAMOND CUTOFF 9" AG X 30X Life	30X	1	

ANNULAR CUTTERS

PROFESSIONAL RANGE

Weldon Shank Annular Cutters For Magnetic Drill Press

Applications

- Metal Fabrication, Electromechanical.
- Installation and Facade.

FEATURES

- 50mm Length Annular cutter for use in magnetic Drill Press with Weldon shank connection.
- Made of High speed steel for increased durability and performance machined with CNC for exceptional accuracy.



ANNULAR CUTTERS

Cat #	Length (mm)	Diameter (mm)	Pack Qty.
DT84500-XJ	14	50	1
DT84501-XJ	16	50	1
DT84502-XJ	18	50	1
DT84503-XJ	20	50	1
DT84504-XJ	22	50	1
DT84505-XJ	24	50	1
DT84506-XJ	26	50	1
DT84507-XJ	28	50	1
DT84508-XJ	30	50	1
DT84509-XJ	32	50	1
DT84510-XJ	40	50	1
DT84511-XJ	50	50	1
DT84512-XJ	Pilot Pin	2 x Pilot	1

DIAMOND CORE BITS

Cat #	Diameter (mm)	Thread	Length (mm)	Pack Qty.
DT9864-QZ	16	1 1/4" UNC(F)	16mm Wet Diamond Core - Long Life	1
DT9866-QZ	20	1 1/4" UNC(F)	20mm Wet Diamond Core - Long Life	1
DT9867-QZ	22	1 1/4" UNC(F)	22mm Wet Diamond Core - Long Life	1
DT9868-QZ	25	1 1/4" UNC(F)	25mm Wet Diamond Core - Long Life	1
DT9708-QZ	52	1 1/4" UNC(F)	52mm Wet Diamond Core - Long Life	1
DT9734-QZ	78	1 1/4" UNC(F)	78mm Wet Diamond Core - Long Life	1
DT9759-QZ	102	1 1/4" UNC(F)	102mm Wet Diamond Core - Long Life	1
DT9785-QZ	127	1 1/4" UNC(F)	127mm Wet Diamond Core - Long Life	1
DT9788-QZ	152	1 1/4" UNC(F)	152mm Wet Diamond Core - Long Life	1
DT9790-QZ	172	1 1/4" UNC(F)	172mm Wet Diamond Core - Long Life	1
DT9793-QZ	200	1 1/4" UNC(F)	200mm Wet Diamond Core - Long Life	1

JIGSAW BLADES

Applications

- Straight & profile cutting of soft & hard wood, plywood, MDF & laminated boards up to 60 mm thickness.
- Straight cutting in plain & perforated sheet metal & aluminum.

FEATURES

- DEWALT HSS jigsaw blades are engineered to deliver a quality cut in a variety of ferrous and non-ferrous metals.
- Fully hardened high speed steel for increased durability.
- DEWALT HCS jigsaw blades are engineered to deliver a quality cut in a variety of materials, including wood, laminates and plastics.



HSS BLADES FOR METAL CULLING / HC SBLADES FOR WOOD CUTTING

Cat #	Applications	Competition Reference	Overall Length (mm)	"Working Length (mm)"	Tooth Pitch (mm)	"Max Depth of Cut (mm)"	Blade Material	Pack Qty.
DT2166-QZ	For fast & straight cuts in Wood and Chip-board up to 60mm thick	T144D	100,0	68,0	4,0	60,0	HCS	5
DT2160-QZ	For straight cuts in aluminium & thin sheet metal from 1.5 - 4mm thick	T118A	76,0	50,0	1,2	4,0	HSS	5
DT2161-QZ	For straight cuts in thick metal, non-ferrous metal & aluminium from 2.5 - 6mm thick	T118B	76,0	50,0	2,0	6,0	HSS	5
DT2163-QZ	For fast, straight cuts in aluminium 4-15mm; metal & non-ferrous metal 4-6mm & plastic up to 30mm thick	T127D	100,0	72,0	3,0	30,0	HSS	5
DT2077-QZ	For use Fast Cutting in wood, plastic-coated wood, fibre boards and plastics	T244D	100,0	70,0	4,0	60,0	HCS	5
DT2169-QZ	For fast, straight cuts in wood & chipboard up to 100mm thick	T344D	152,0	116,0	4,0	100,0	HCS	5
DT2059-QZ	Multi Material, wood- 65 mm, Metal-10mm	T345XF	132,0	101,0	5,0	65,0	BiM	5
DT2085-QZ	For straight cuts in thin sheet metal, pipes and profiles (1.5 - 3mm) including aluminium to 65mm thick	T318A	132,0	108,0	1,2	3,0	HSS	5
DT2186-QZ	For fast straight cuts in wood and chip board , plywood, laminated chipboard and plastic up to 60 mm thick.	T144D	75,0	50,0	4,0	60,0	HCS	100
DT2160B	For straight cuts in aluminium & thin sheet metal from 1.5 - 4mm thick	T118A	76,0	50,0	1,2	4,0	HSS	100
DT2161B	For straight cuts in thick metal, non-ferrous metal & aluminium from 2.5 - 6mm thick	T118B	76,0	50,0	2,0	6,0	HSS	100

PROMOLINE / COMBINATION SETS AND SCREW DRIVING BITS / NUT DRIVERS



PROMOLINE / COMBINATION SETS

Cat #	Description	Type	No. of Pcs.	Pack Qty.
DT6952-QZ	CASSETTE TYPE MASONRY DRILLS 5PC SET	Masonry Bits	5	1
DT60302-QZ	SDS+ Drill Bit 6 PC SET	SDS+ Bits	6	1
DT5911-QZ	HSS - R 10 PC SET	HSS - R Bits	10	1
DT5912-QZ	HSS-R 13 PC SET	HSS - R Bits	13	1
DT5913-QZ	HSS - R 19 PC SET	HSS - R Bits	19	1
DT5930-QZ	HSS - R 29 PC SET	HSS - R Bits	29	1
DT5921-QZ	HSS - G 10 PC SET	HSS- G Bits	10	1
DT5923-QZ	HSS - G 19 PC SET	HSS- G Bits	19	1
DT5929-QZ	HSS - G 29 PC SET	HSS- G Bits	29	1
DT71507-QZ	Compact Rapid Load B0 Drill Drive-27 PC SET	Drill Driver Set	27	1
DE0109-XJ	SET 109 PCS DE0109-XJ	Mixed Accessories Set	109	1
DT71563-QZ	100pc Drill Drive SET	Mixed Accessories Set	100	1
DT7506-QZ	17pcs Socket Set(6, 8,10,11,12,13,14...)	SOCKET SET	17	1

SCREW DRIVING BITS & NUT DRIVERS


Cat #	Description	Size (mm)	Type	Pack Qty.
DT7225-QZ	50mm Torsion bit Pozi Pz1 x 5	50	Pz1	5
DT7226-QZ	50mm Torsion Pozi PZ2 X5	50	Pz2	5
DT7245-QZ	50mm Torsion bit Phillips Ph1 x 5	50	Ph1	5
DT7246-QZ	50mm Torsion bit Phillips Ph2 x 5	50	Ph2	5
DT7203-QZ	110MM POZI PZ2 X5	110	Pz2	5
DT7204-QZ	110mm Phillips Ph2 x5	110	Ph2	5
DT7290-QZ	70MM TORX BIT T10 X5	70	T10	5
DT7291-QZ	70mm Torx Bit T15 x5	70	T15	5
DT7292-QZ	70mm Torx Bit T20 x 5	70	T20	5
DT7293-QZ	70mm Torx Bit T25 x 5	70	T25	5
DT7295-QZ	70mm Torx Bit T30 X 5	70	T30	5
DT7500-QZ	MAGNETIC BIT HOLDER	x	Hex	1
DWA00003	65 mm PH2-PH2 D-end S2 BITS SET (10PC)	65	Ph2	10
DW00003M-IN	Magnetic 65 mm PH2-PH2 D-end S2 BITS SET (10PC)	65	Ph2	10
DWA00001	110mm PH2-PH2 D-end S2 BITS SET (5PC)	110	Ph2	5
DW00001M-IN	Magnetic 110mm PH2-PH2 D-end S2 BITS SET (5PC)	110	Ph2	5
DT7401-QZ	1/4" MAGNETIC HEX NUT DRIVER 7MM	7	Hex	1
DT7402-QZ	1/4" MAGNETIC HEX NUT DRIVER 8MM	8	Hex	1
DT7403-QZ	1/4" MAGNETIC HEX NUT DRIVER 10MM	10	Hex	1
DT7404-QZ	1/4" MAGNETIC HEX NUT DRIVER 13MM	13	Hex	1



FEATURES

General Medium Duty construction applications including:

- Drywall tracks with deflection heads.
- Wire Mesh fixing with 25mm lathing washers.
- Fixing clips and clomps for electricians and plumbers.
- Furring strips to concrete and block.



CONCRETE NAILS - SUITABLE FOR :DCN890

Cat #	Description	Length (mm)	Shank Dia. (mm)	Head Dia. (mm)	Box Quantity	Carton Quantity
DCN8901020	20 x 2.6mm Std Zinc Plated Nails	20	2,6	6,3	1005	5025
DCN8901025	25 x 2.6mm Std Zinc Plated Nails	25	2,6	6,3	1005	5025
DCN8901040	40 x 2.6mm Std Zinc Plated Nails	40	2,6	6,3	1005	5025
DCN8901050	50 x 2.6mm Std Zinc Plated Nails	50	2,6	6,3	510	2550
DCN8901055	55 x 2.6mm Std Zinc Plated Nails	55	2,6	6,3	510	2550
DCN8903013	13 x 3mm XH Extra Hard Zinc Plated Nails	13	3,0	6,3	1000	5000
DCN8903017	17 x 3mm XH Extra Hard Zinc Plated Nails	17	3,0	6,3	1005	5025
DCN8903022	22 x 3mm XH Extra Hard Zinc Plated Nails	22	3,0	6,3	1005	5025
DCN8903043	43 x 3mm XH Extra Hard Zinc Plated Nails	43	3,0	6,3	510	2550
DCN8903048	48 x 3mm XH Extra Hard Zinc Plated Nails	48	3,0	6,3	510	2550

WOOD-NAILS, 16 GA SUITABLE FOR: BATTERY-POWERED DC618, DCN660

Cat #	Description	Type	Diameter (mm)	Length (mm)	Pack Quantity
DNBA1632GZ	Stuffer head galvanized	20 °	1.39 X 1.61	32	2500
DNBA1650GZ	Stuffer head galvanized	20 °	1.39 X 1.61	50	2500
DNBA1663GZ	Stuffer head galvanized	20 °	1.39 X 1.61	63	2500


OTHER ACCESSORIES

Cat #	Description	Type	Pack Quantity
DT20715-QZ	Multi-Tool Accessory 5 pc set for DCS355	Multi Tool	5
DT20719-QZ	Abrasive Sanding Surface for DCS355/ Universal (Carbide Rasp)	Multi Tool	1
DT20709-QZ	Blade DCS355 (22 TPI Titanium Coated SEMI-CIRCLE BLADE for Wood & Nails)/ Universal	Multi Tool	1
DT20700-QZ	MULTI TOOL SANDING PLATTEN For DCS355	Multi Tool	1
DT20705-QZ	65 mm X 43 mm Wide Fast Cut Wood Blade for DCS355	Multi Tool	1
DT2974-QZ	17" CLASS 12 POROTON ALLIGATOR TCT	Alligator Blade	1
DT2361-QZ	152mm recip for metal (5 pcs / box)	Recip Saw Blade	5
DT99554-QZ	XR- Xtreme Series 152MM 6IN 6TPI WOOD RE (5pc/Box)	Recip Saw Blade	5
DE7330-XJ	Dewalt Planer Blades for DW733	Planer Blade	1
DT8473-QZ	BAND SAW BLADE FOR DW876	Band Saw Blade	1
DT20660-QZ	40cm Chainsaw Bar Guide	Chain Saw	1
DT20663-QZ	DEWALT 40 CM REPLACEMENT CHAIN	Chain Saw	1
DT20664-QZ	DEWALT 46CM REPLACEMENT CHAIN	Chain Saw	1
DT7030-QZ	ADAPTOR CHUCK SDS	Hammer Accessory	1
DT4951-QZ	MIXER TOOL	Hammer Accessory	1

PV50-PRO POLYESTER ANCHOR

- Polyester mortar with an ETA option 7 approval for M8-M24 rods
- Approval valid when using standard trade rods and rods from other manufacturers
- Installation up to -5°C approved
- 18 month shelf life

SUITABLE BASE MATERIALS



APPROVALS



CatNo.	Description	Pack Quantity	Carton Quantity
DFC1310150	PV50-PRO-345ML Adhesive Cartridge	1	15

SETTING TIMES

TEMP °C	GEL	SET DRY
- 5° C	90 min	360 min
0° C	45 min	180 min
5° C	25 min	120 min
10° C	15 min	80 min
20° C	6 min	45 min
30° C	4 min	25 min
35° C	2 min	20 min

PV50-PRO ACCESSORIES NOZZLES

NOZZLES



CatNo.	Description	Pack Quantity	Carton Quantity
DFC1640450	Adhesive Mix Nozzle - Black - 14 Element	10	1200

PV50-PRO ACCESSORIES DISPENSING TOOLS



CatNo.	Description	Pack Quantity	Carton Quantity
DFC1610150	360ML Manual Adhesive Dispensing Tool	1	10

AC100-PRO STYRENE FREE VINYLESTER ANCHOR

AC100-PRO RANGE



360ml

ETA option 1

Most versatile

- Vinylester chemical anchor, approved for almost any application and base material
- Approved for seismic loads according to category C1
- Approved temperature range of 120°C and a fast curing time for high loads
- Suitable for use in rotary hammer drilled holes, water filled holes, for overhead applications and embedment depths of $\geq 4x\varnothing - 20x\varnothing$
- 18 month shelf life (12 months for 300ml size)

EUROPEAN TECHNICAL APPROVAL

CatNo.	Description	Pack Quantity	Carton Quantity
DFC1230100	AC100-PRO-360ML Adhesive Cartridge	1	10


SETTING TIMES

TEMP °C	GEL	SET DRY	SET WET
-10° C	90 min	24 h	48 h
-5° C	90 min	14 h	28 h
0° C	45 min	7 h	14 h
5° C	25 min	2 h	4 h
10° C	15 min	80 min	160 min
20° C	6 min	45 min	90 min
30° C	4 min	25 min	50 min
35° C	2 min	20 min	40 min
40° C	1.5 min	15 min	30 min

AC100-PRO ACCESSORIES NOZZLES



DFC1640450



DFC1640500/DFC1640200/DFC1640250/DFC1640300

CatNo.	Description	Pack Quantity	Carton Quantity
DFC1640450	Adhesive Mix Nozzle - Black - 14 Element	10	1200

AC100-PRO ACCESSORIES DISPENSING TOOLS




DFC1610050

CatNo.	Description	Pack Quantity	Carton Quantity
DFC1610050	360ML Manual Adhesive Dispensing Tool	1	10

PURE 150-PRO STYRENE FREE EPOXY ANCHOR

- Pure epoxy mortar with ETA-option 1 approval, for use in cracked and uncracked concrete
- The mortar can be used for overhead applications and in dry, wet and water filled holes
- The cracked concrete approval is valid for fixing with normal threaded rods, rebars and an internal threaded sleeve. The approval covers threaded rods with diameters M8-M30 and rebars diameter Ø8-Ø32
- Approved for diamond drilled holes
- Approved for seismic loads according to category C1
- 24 month shelf life

SUITABLE BASE MATERIALS



585ml

CatNo.	Description	Pack Quantity	Carton Quantity
DFC1110050	PURE150-PRO - 585ML Adhesive Cartridge	1	15

SETTING TIMES

TEMP °C	GEL	SET DRY	SET WET
+5	2 h	50 h	100 h
+10	90 min	30 h	60 h
+20	30 min	10 h	20 h
+30	20 min	6 h	12 h
+40	12 min	4 h	8 h

PURE 150-PRO ACCESSORIES NOZZLES



DFC1640350 DFC1640500/DFC1640200/DFC1640250/DFC1640300

CatNo.	Description	Pack Quantity	Carton Quantity
DFC1640350	Adhesive Mix Nozzle - White - 18 Element	10	600

PURE 150-PRO ACCESSORIES DISPENSING TOOLS




DFC1610350






CatNo.	Description	Pack Quantity	Carton Quantity
DFC1610350	385ML/585ML Manual Adhesive Dispensing Tool	1	-

THREADED RODS CHISEL POINT

- Anchor studs with chisel point, to be used in combination with SC-PRO for ETA to apply

THREADED ROD CHISEL POINT - ZINC PLATED CLASS 5.8 STEEL









CatNo.	Description	 Length [mm]	 DrillDia. [mm]	 ThreadSize [mm]	 Pack Quantity	 Carton Quantity
DFC4130000	Chisel Point Threaded Rod STM8x110-5.8Steel w/Nut & Washer	110	10	M8	10	200
DFC4130050	Chisel Point Threaded Rod STM10x130-5.8Steel w/Nut & Washer	130	12	M10	10	200
DFC4130100	Chisel Point Threaded Rod STM12x160-5.8Steel w/Nut & Washer	160	14	M12	10	100
DFC4130150	Chisel Point Threaded Rod STM16x190-5.8Steel w/Nut & Washer	190	18	M16	10	40
DFC4130200	Chisel Point Threaded Rod STM20x260-5.8Steel w/Nut & Washer	260	24	M20	5	20
DFC4130250	Chisel Point Threaded Rod STM24x300-5.8Steel w/Nut & Washer	300	28	M24	5	20

THREADED RODS STRAIGHT CUT

- Anchor studs with straight cut, to be used in combination with DeWALT chemical anchors

THREADED ROD STRAIGHT CUT - ZINC PLATED 5.8 GRADE



CatNo.	Description	 Length [mm]	 DrillDia. [mm]	 ThreadSize [mm]	 Pack Quantity	 Carton Quantity
DFC4180000	Straight Cut Threaded Rod M8 & 110 w/Nut & Washer	110	10	M8	25	200
DFC4180050	Straight Cut Threaded Rod M10 & 130 w/Nut & Washer	130	12	M10	25	100
DFC4180100	Straight Cut Threaded Rod M12 & 160 w/Nut & Washer	160	14	M12	10	200
DFC4180150	Straight Cut Threaded Rod M16 & 190 w/Nut & Washer	190	18	M16	10	40
DFC4180200	Straight Cut Threaded Rod M20 & 240 w/Nut & Washer	240	24	M20	10	40
DFC4180250	Straight Cut Threaded Rod M24 & 290 w/Nut & Washer	290	28	M24	10	40
DFC4180300	Straight Cut Threaded Rod M27 & 340 w/Nut & Washer	340	30	M27	5	25
DFC4180350	Straight Cut Threaded Rod M30 & 380 w/Nut & Washer	380	35	M30	5	20

DEWALT SERVICE

CONVENIENCE: At the heart of the DEWALT® service are the 470+ service stations conveniently located throughout the country, with specialists always available to answer any questions whether you are on or off the jobsite.

SPEED: Having your tools back in action in the fastest time possible is our prime objective. Subject to parts availability, most repairs should not take more than 48 hours in the workshop and for those smaller urgent repairs we provide a “while-u-wait” service.

QUALITY: Highest Quality is assured with DEWALT® factory trained technicians carrying out all repairs with all work being backed by our 3 months Service warranty. Each DEWALT® repair comes with our personal “satisfaction tag” listing all the work done and a DEWALT® contact telephone number should you be less than 100% happy with the repair.

GENUINE PARTS: All parts used in repairs are original, ensuring both the highest quality and a perfect fit every time.

ONLINE SERVICE: www.2helpU.com provides information on the DEWALT® After Sales Services, including DEWALT® authorised repair agent locations, some frequently asked questions, technical Information, spare part details, warranty policy and recycling of used tools.




www.2helpU.com



CUSTOMER EXPERIENCE CENTRE

Stanley Black & Decker currently operates state of art customer experience centers in four locations across Asia in Seoul - South K orea, Bangkok - Thailand, Pune – India & Suzhou – China. These centers not only enables us to showcase leading innovations in the world of powers tools, hand tools & power tool accessories it also provided a great platform for our customers to get an hands-on experience on using these products and make the right selection for some of their most demanding applications.

In addition these centers are used for safety & application trainings for industrial applications, new employee induction & advance employee modules, customer & channel par tner team training, top to top interactions and last but not the least Corporate Social R esponsibility initiatives centered around makers of tomorrow – tradesmen, contractors and students in true spirit of our corporate mission. F or the builders and protectors, for the makers and explorers, for those shaping and reshaping our world through hard work and inspiration, Stanley Black & Decker provides the tools and innovative solutions you can trust to get the job done - and we have since 1843.



DEMO ZONE



DEMO ZONE

Stanley Black & Decker India Pvt. Ltd.,

28 Akemps, 3rd main, 1st Cross, Ashwini Layout,
Koramangala Intermediate Ring Road, Bangalore-560 047.
Tel: +91 80 6791 9900 F: +91 80 6660 8828
E: sbd-customercommunications@sbdinc.com
Service Helpline No.18604251111
www.dewalt.co.in